


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

BUGLE HEAD SQUARE DRIVE TYPE 17 COARSE THREAD DECK SCREWS

The following Specification Sheet applies to all **Bugle Head Square Drive Type 17 Coarse Thread Deck Screws** – Steel Zinc/All-Weather Coating in our **RDS** series of screws.

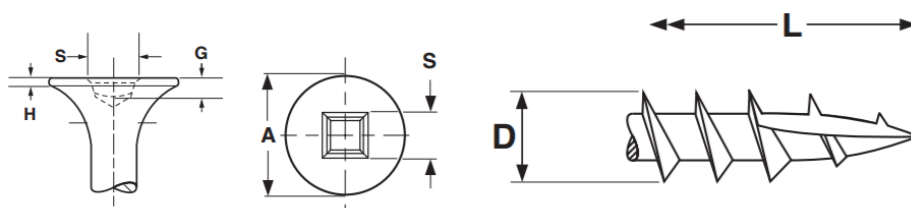

BUGLE HEAD TYPE-17 DECK SCREWS												
Nominal Size	Threads per Inch	D		A		H		S		G		Square Recess Driver Size
		Major Diameter		Head Diameter		Head Thickness		Square Recess Drive				
								Recess Square		Depth		
		Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	
6	8 to 10	.158	.142	.347	.315	.031	.020	.106	.090	.071	.055	1
8	8 to 10	.187	.170	.363	.315	.039	.020	.113	.110	.075	.064	2
10	8	.211	.192	.363	.334	.039	.020	.113	.110	.075	.064	2
12	8	.239	.212	.435	.390	.055	.042	.135	.131	.115	.105	3
1/4	8	.270	.240	.472	.450	.058	.047	.135	.131	.115	.105	3
Tolerance on Length		Up to 1" Incl.						Over 1"				
		-0, +0.60						-0, +0.100				
In the absence of a single industry standard for Bugle Head Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable.												

Description	A bugle head, externally threaded fastener with a countersunk head, square socket recess, and a single-lead thread. The screw has a chip cavity cut out where the final several threads end at the tip.
Applications/ Advantages	Designed specifically for joining pieces of pressure treated lumber. Provides corrosion resistance superior to phosphate-coated drywall screws without discoloring the wood. The square drive recess is preferred by some for its excellent torque transmission and resistance to cam-out problems.
Material	AISI 1080 or equivalent steel
Plating	Screws have a green ceramic coating intended to withstand a salt-spray test of 500 hours

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358