


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

FENDER WASHER – GALVANIZED

The following Specification Sheet applies to all **Fender Washers – Galvanized** in our **JW and W series**.

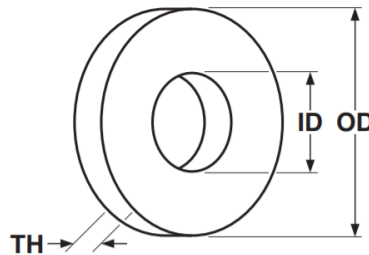

FENDER WASHERS				
Bolt Size	Inside Diameter ($\pm .010$)	Outside Diameter ($\pm .010$)	Thickness	
			Max	Min
3/8	13/32	1-1/4	.080	.051

Description	A flat washer with significantly more surface area than a USS or SAE washer. They are also made from a thinner gauge metal than most flat washers.
Applications/ Advantages	Used where an extra wide bearing surface is required. Originally designed for auto body repair work, they are also used in sheet metal, plumbing, and electrical work. Also used to attach signs to posts, to install drywall and wood paneling.
Material	Washers shall be punched from hot-rolled, hot-rolled and pickled or cold-rolled steel, or shall be machined from bar stock or tubing, or may be forged at the manufacturer's option.
Plating	Hot-Dip or Electro-Galvanized finish

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358