




Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

FINISHING WASHERS – STEEL NICKEL AND 18-8 STAINLESS STEEL

The following Specification Sheet applies to all **Finishing Washers – Steel Nickel and 18-8 Stainless Steel** in our **JCW** series.

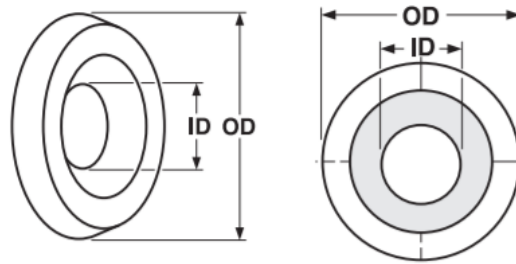

COUNTERSUNK FINISHING WASHERS						
Screw Size	Outside Diameter		Inside Diameter		Overall Height	
	Max	Min	Max	Min	Max	Min
6	.469	.424	.200	.161	.103	.078
8	.543	.518	.220	.180	.110	.086
10	.606	.581	.279	.235	.126	.103
12	.704	.656	.299	.259	.138	.113

NOTE: There is currently no single set of specifications for countersunk finishing washers accepted as an industry standard. These dimensions are offered as a guideline to what is available. If dimensions are critical, please contact us to confirm our exact stock specifications.

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

Description	A formed circular washer designed for use with flat or oval head screws. This is a raised type of finishing washer which is convex shaped. For use with 82° countersunk flat and oval head screws.
Applications/ Advantages	Designed for accommodating the heads of countersunk screws. It provides additional bearing area on the material being fastened and can be used to give a neat, finished appearance.
Material	Steel: Washers shall be punched from hot-rolled, hot-rolled and pickled or cold-rolled steel, or shall be machined from bar stock or tubing, or may be forged at the manufacturer's option. Stainless: 18-8 Stainless Steel
Plating	Steel countersunk finishing washers are typically supplied with a nickel plating. Other coatings such as black oxide are also popular. Stainless washers are usually supplied without additional finish.

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358