


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

HEX NYLON INSERT LOCK NUTS – METRIC, 18-8 STAINLESS STEEL

The following Specification Sheet applies to all **Hex Nylon Insert Lock Nuts – Metric, 18-8 Stainless Steel** in our **JMNYN** series.

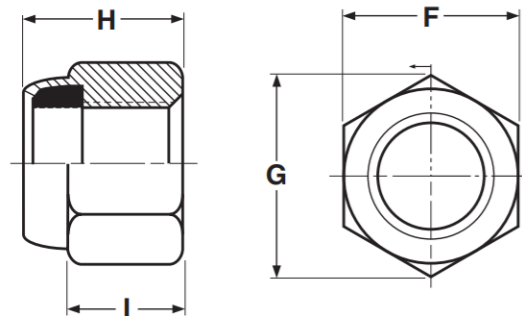

METRIC - NYLON INSERT STOP NUTS, REGULAR PATTERN, CLASS 8						DIN 985
Nominal Size	F		G	H		I
	Width Across Flats		Width Across Corners	Thickness		Wrenching Height
	Max	Min	Min	Max	Min	Min
M3	5.50	5.32	6.01	4	3.7	2.4
M4	7.00	6.78	7.66	5	4.7	2.9
M5	8.00	7.78	8.79	5	4.7	3.2
M6	10.00	9.78	11.05	6	5.7	4
M7	11.00	10.73	12.12	7.5	7.14	4.7
M8	13.00	12.73	14.38	8	7.64	5.5
M10	17.00	16.73	18.90	10	9.64	6.5
M12	19.00	18.67	21.10	12	11.57	8
M14	22.00	21.67	24.49	14	13.3	9.5
M16	24.00	23.67	26.75	16	15.3	10.5
M18	27.00	26.16	29.56	18	17.66	13
M20	30.00	29.16	32.95	20	18.7	14


Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

Description	Hex nut with a metric thread pitch and a nylon-filled collar at its back end. When a screw reaches the collar, the threads and nylon form a tight, frictional fit, restricting movement of the screw when it is subjected to vibration. The nylon insert comes in various colors.
Applications/ Advantages	Designed to be used with like-material machine screws and bolts. It is able to be reused more times than a two-way reversible nut. It is less expensive than a Grade-C automation lock nut. Nylon insert lock nuts are designed for use in temperatures from -73°C to +120°C.
Material	<i>Stainless</i> 18-8: 18-8 Stainless Steel A4: A4 Stainless Steel
Proof Load	18-8: 72,500 psi. A4-70: 101,570 psi.
Plating	-

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358