




# Metallics

An **AMERICAN** Source For Premier  
and Innovative Fasteners and Anchors

## HEX TAP BOLTS – STEEL ZINC AND 18-8 STAINLESS STEEL

The following Specification Sheet applies to all **Hex Tap Bolts – Steel Zinc and 18-8 Stainless Steel** in our **HTB, JHTB, and JSHTB** series.

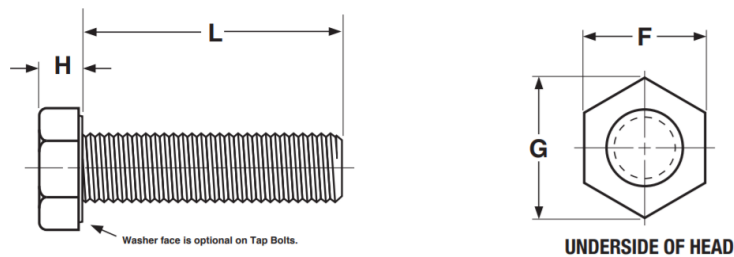

FULLY THREADED HEX TAP BOLTS									IFI-199 (2014)
Nominal or Basic Product Diameter	F			G		H			
	Width Across Flats			Width Across Corners		Head Height			
	Basic	Max.	Min.	Max.	Min.	Basic	Max.	Min.	
1/4	7/16	0.438	0.425	0.505	0.484	11/64	0.188	0.150	
5/16	1/2	0.500	0.484	0.577	0.552	7/32	0.235	0.195	
3/8	9/16	0.562	0.544	0.650	0.620	1/4	0.268	0.226	
7/16	5/8	0.625	0.603	0.722	0.687	19/64	0.316	0.272	
1/2	3/4	0.750	0.725	0.866	0.826	11/32	0.364	0.302	
5/8	15/16	0.938	0.906	1.083	1.033	27/64	0.444	0.378	
3/4	1 1/8	1.125	1.088	1.299	1.240	1/2	0.524	0.455	
7/8	1 5/16	1.312	1.269	1.516	1.447	37/64	0.604	0.531	
1	1 1/2	1.500	1.450	1.732	1.653	43/64	0.700	0.591	

### Metallics

229 Cross Street  
Bristol, CT 06010

[www.metallics.us](http://www.metallics.us)

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



# Metallics

An **AMERICAN** Source For Premier  
and Innovative Fasteners and Anchors

<b>Description</b>	<p><b>ASTM A307 Tap Bolt:</b> A low carbon, hex head bolt with a machined point which is threaded to the head.</p> <p><b>Grade-5 Tap Bolt:</b> A tap bolt made from medium carbon steel.</p> <p><b>Grade-8 Tap Bolt:</b> A tap bolt made from medium carbon alloy steel and heat-treated.</p> <p><b>Stainless Tap Bolt:</b> A tap bolt made from 18-8 stainless steel.</p>
<b>Applications/ Advantages</b>	<p><b>ASTM A307 Tap Bolt:</b> To be used in drilled and tapped holes which are threaded full length. Used instead of a stud and a nut.</p> <p><b>Grade-5 Tap Bolt:</b> Used to mount motors to machinery; also popular in automotive and truck repair.</p> <p><b>Grade-8 Tap Bolt:</b> Used in automotive and fleet industries where greater tensile strength is required than can be met by a grade-5.</p> <p><b>Stainless Tap Bolt:</b> Used in environments corrosive to carbon steel, in tapped holes that are threaded full length.</p>
<b>Material</b>	<p><b>ASTM A307 Tap Bolt:</b> Bolts shall be made from a carbon steel which conforms to the following chemical composition requirements-- Carbon: 0.33 maximum; Manganese: 0.93; Phosphorous: 0.041</p> <p><b>Grade-5 Tap Bolt:</b> AISI 1030 - 1541 or equivalent medium carbon steel. Use of an alloy such as 4037 modified steel is also acceptable.</p> <p><b>Grade-8 Tap Bolt:</b> Medium carbon alloy steel. Note: For diameters 1/4 thru 7/16 inch, it is permissible to use AISI 1541 steel.</p> <p><b>Stainless Tap Bolt:</b> 18-8 Stainless steel</p>
<b>Heat Treatment</b>	<p><b>Grade-5 Tap Bolt:</b> Bolts shall be heat treated, oil or water quenched, at the option of the manufacturer, and tempered at a minimum tempering temperature of 800°F.</p> <p><b>Grade-8 Tap Bolt:</b> Bolts shall be heat treated, oil quenched and tempered at a minimum tempering temperature of 800°F.</p>
<b>Core Hardness</b>	<p><b>ASTM A307 Tap Bolt:</b> Rockwell B69 - B100</p> <p><b>Grade-5 Tap Bolt:</b> Rockwell C25 - C34</p> <p><b>Grade-8 Tap Bolt:</b> Rockwell C33 - C39</p> <p><b>Stainless Tap Bolt:</b> 1/4 thru 5/8" diam: Rockwell B95 - C32</p>
<b>Surface Hardness</b>	<p><b>Grade-5 Tap Bolt:</b> Rockwell 30N54 maximum</p> <p><b>Grade-8 Tap Bolt:</b> Rockwell 30N58.6 maximum</p>
<b>Proof Load</b>	<p><b>Grade-5 Tap Bolt:</b> 85,000 psi.</p> <p><b>Grade-8 Tap Bolt:</b> 120,000 psi.</p>
<b>Yield Strength*</b>	<p><b>Grade-5 Tap Bolt:</b> 92,000 psi. minimum</p> <p><b>Grade-8 Tap Bolt:</b> 130,000 psi. minimum</p> <p><b>Stainless Tap Bolt:</b> 1/4 thru 5/8" diam: 60,000 psi. minimum</p>
<b>Tensile Strength</b>	<p><b>ASTM A307 Tap Bolt:</b> 60,000 psi. minimum</p> <p><b>Grade-5 Tap Bolt:</b> 120,000 psi. minimum</p> <p><b>Grade-8 Tap Bolt:</b> 150,000 psi. minimum</p> <p><b>Stainless Tap Bolt:</b> 1/4 thru 5/8" diam: 95,000 psi. minimum</p>
<b>Elongation*</b>	<p><b>ASTM A307 Tap Bolt:</b> 18% minimum</p> <p><b>Grade-5 Tap Bolt:</b> 14% minimum</p> <p><b>Grade-8 Tap Bolt:</b> 12% minimum</p>
<b>Reduction of Area*</b>	<p><b>Grades 5 &amp; 8 Tap Bolts:</b> 35% minimum (all sizes)</p>

## Metallics

229 Cross Street  
Bristol, CT 06010

[www.metallics.us](http://www.metallics.us)

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358