



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

WALL CLAW HAMMER-IN DRYWALL ANCHORS

The following Specification Sheet applies to all Wall Claw Hammer-In Drywall Anchors in our **MWCA** series.



Base Material

Drywall (Gypsum Wallboard) - 1/2-inch or 5/8-inch.

Anchor Material

The WallClaw Anchor has a finish nail starter and a blade-like body that easily penetrates drywall with minimal damage to the wall. This means the holding strength of the drywall is greater. The anchor's wide platform fins near the head provide greater load bearing capacity.

WallClaw Anchors are made of engineered nylon.

Fastener

Screws: #8 x 1-1/4"; Slot-Phillips Combo-Pan Head, Type 'B', Zinc. Provided with anchor.

Product Description


The WallClaw Anchor is a one piece, drivable wall anchor designed for use in both 1/2-inch and 5/8-inch drywall.

No drilling is required – simply hammer it in like a nail, attach the fixture to be mounted to the wall and fasten.

It is the fastest, easiest and among the strongest anchors available on the market.

Installation Instructions


1 Hammer in

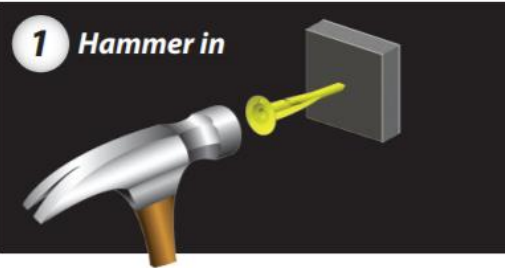

1. HAMMER IN

Hammer the anchor into the drywall with the arrow on the head of the anchor up.

2 Fasten

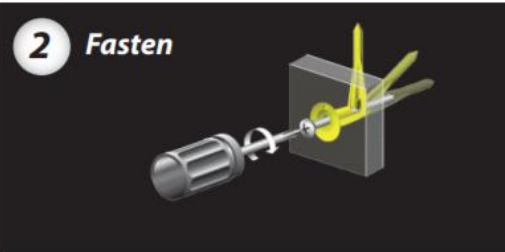

2. FASTEN

Place the device or fixture to be installed against the WallClaw Anchor opening and insert the screw provided. Tighten screw until secure. Do not over tighten.

Product Performance

Hangs up to 90 lbs. in 1/2-inch drywall.
Hangs up to 125 lbs. in 5/8-inch drywall.

Certified Construction Lab Test Results with Safety Factor with safety factors applied to recommended loads.

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358