
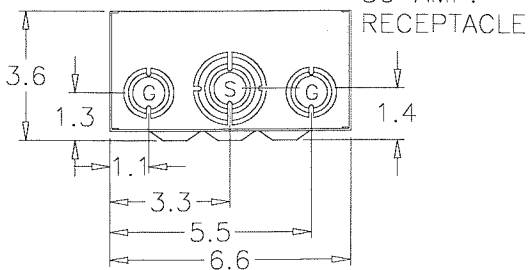
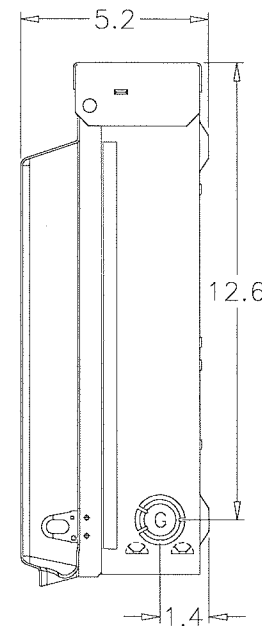
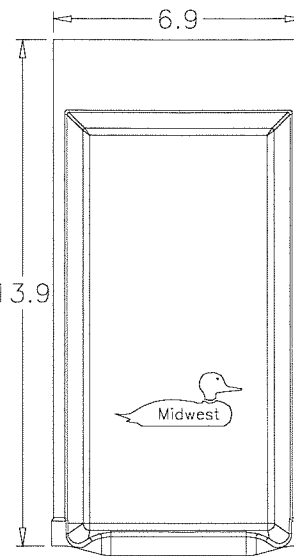
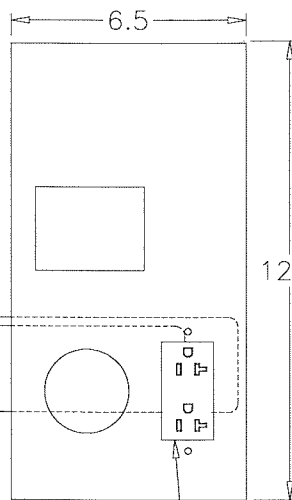
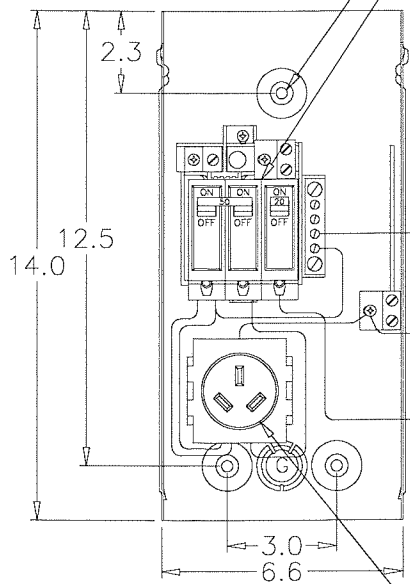


KNOCKOUT TABLE:

| |
|--------------------------------------|
| S= 1/2", 3/4", 1", 1-1/4", 1-1/2" KO |
| G= 1/2", 3/4", 1" KO |

5/16" MOUNTING HOLE (3X)
 3 CIRCUIT 70 AMP LOAD CENTER
 50 AMP. BREAKER 2-POLE
 20 AMP. BREAKER 1-POLE

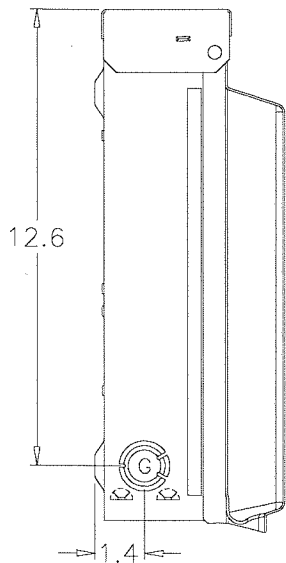

WIRE RANGE TABLE:

| CONNECTOR | COPPER | | ALUMINUM | |
|----------------------|--------|--------|----------|--------|
| | SOLID | STRAND | SOLID | STRAND |
| LINE | 14-8 | 14-2 | 12-8 | 12-2 |
| LOAD | 14-10 | 14-10 | ----- | ----- |
| NEUTRAL END HOLE | 14-8 | 14-2 | 12-8 | 12-2 |
| NEUTRAL SIDE HOLE | 14-8 | 14-4 | 12-8 | 12-4 |
| EQUIP. GRND | 12-8 | 12-2 | 12-8 | 12-2 |

MIDWEST ELECTRIC PRODUCTS, INC.
 Mankato, MN

Dr. By: JDE
 Ck. By:
 CR: RO814112

* = Critical To Quality

Unless Otherwise Specified

AutoCad Generated

Tolerances On:
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003

Dimensions Are in Inches

SCALE 1 : 1
 SIZE A

SHEET 1 OF 1

TITLE: U051C
 OUTLINE DRAWING

DWG NO: 265A6213

SH16

Rev.1 CR RO814112 JE 2-18-08
 Rev.2 CR R1111415 CJS 8-16-11

X