


# Accessories

## Clock Hanger

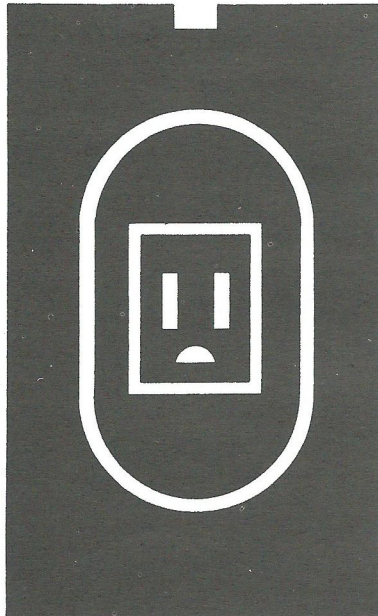



3 Wire with 6" Leads  
Recept. UL listed  
15A-125V Rating

<b>SPRAYED ALUMINUM</b>  Painted Steel (3WIHPSL)  40586	<b>ALUMINUM (.040")</b>  Satin Finish (3WIHP5AL)  40587	<b>ALUMINUM (.050")</b>  Clear Anodized (3WIHP5AA)  40588	<b>CHROME PLATED</b>  Steel Polished (3WIHP5CA)  40589
<b>STAINLESS TYPE 430</b>  Satin Finish (3WIHP5SS)  40590	<b>STAINLESS TYPE 302</b>  Spec. Grade Satin Finish (3WIHP302SS)  40591	<b>SOLID BRASS</b>  Satin Finish US#4 (3WIHP4BB)  40592	<b>SOLID BRONZE (.040")</b>  Satin Finish US#10 (3WIHP4SBR)  40595


<b>SPRAYED BRASS</b>  Painted Steel (3WIHPBA)  40580	<b>IVORY SEMI-GLOSS</b>  Painted Steel (3WIHP5IA)  40581	<b>WHITE SEMI-GLOSS</b>  Painted Steel (3WIHP5WA)  40582	<b>WHITE WRINKLE</b>  Painted Steel (3WIHP5DW)  40583	<b>BROWN WRINKLE</b>  Painted Steel (3WIHP5DB)  40584	<b>IVORY WRINKLE</b>  Painted Steel (3WIHP5DI)  40585
--	--	--	---	---	---

## ENERGY SAVING INSULATING GASKETS


**Comply With Current Code Requirements**  
Mulberry's energy saving gaskets prevent the loss of heat and cold through outlets and switches located on outside walls. Constructed of UL listed cross link, close cell polyethylene insulating foam, they are available for single gang switch and duplex receptacles. Easy to install, they can be ganged by trimming or overlapping.

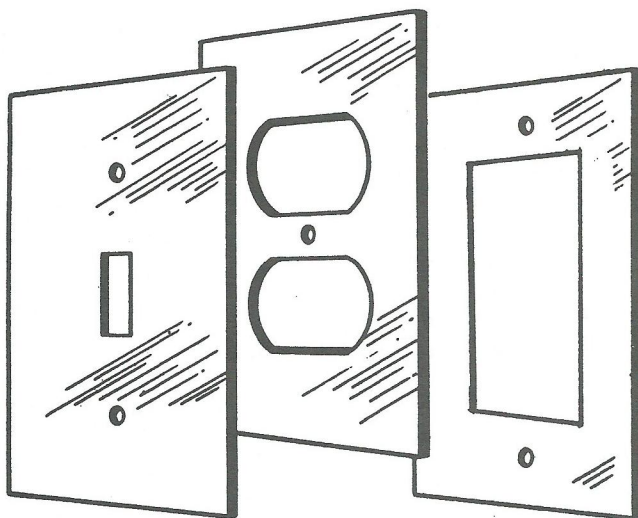

#40671  
1 Toggle Switch



#40601  
1 Duplex Receptacle



#40635  
1 GFI Receptacle

**Box Carton**  
50 500