

VAST

Ceiling mounted • Dry location listed



Description:

Beautiful and expansive in design, the 72" Vast ceiling fan is ideal for use in large areas for maximum cooling. A white opal shade complements an Antique Bronze finish with Chrome Accents. Featuring an energy efficient DC motor with 18W light source, Vast is dimmable and offers a 3000K-color temperature. A full function remote control with batteries is included. Can be used to comply with California Title 20. Can be used to comply with 2016 Title 24 JA8.

Specifications:

- Antique Bronze (-20) (painted)
- Steel construction
- Frosted glass bowl
- Eight-blade 72" Vast ceiling fan features an LED light source, offering both form and function with energy- and cost-savings benefits
- The light kit contains a white opal glass shade and is comprised of a 18W dimmable 3000K LED module, offering 1400 lumens, 90+ CRI
- Six speed full function remote control with batteries is included - and controls full range dimming and fan speed capabilities
- As a general rule of thumb, lighting experts suggest this fan is ideal in a room size that is larger than 400-square feet
- UL dry location listed
- A 3/4" x 6" downrod is included. Longer accessory downrods can be ordered separately
- Mounting hardware is included
- Can be used to comply with California Title 20.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- 80" of wire supplied
- Antique Bronze blades, aluminum construction
- 14 degree blade pitch
- Six Speed Full Function Remote Control Included
- Six speed , manual reverse control
- Meets California Title 24 JA8-2016
- Airflow: 7982 CFM*
- Energy consumption: 28 watts (excluding lights)*
- Airflow efficiency: 285 cfm/watt*
- * Fan on a downrod

Performance:

Number of Modules	1
Input Power	18w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	1400/77.8 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	(L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	Limited Lifetime warranty
Labels	UL Dry location listed
	Meets California Title 24 JA8-2016

For more information visit our website: www.progresslighting.com


P2550-2030K

Images:



Dimensions:

Diameter: 72"
Height: 16-3/4"

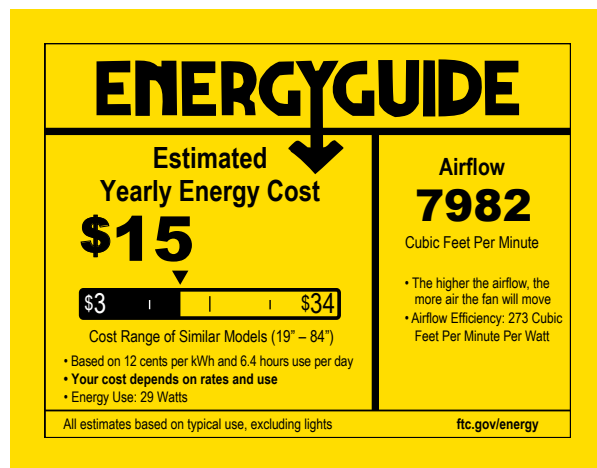

P2550-2030K**Dimming Notes:**

P2550 is designed to be compatible with many controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

"Lutron - NTEVL-300

Lutron - DVELV-300P

Lutron-DVCL-253P

Lutron - Caseta Wireless

IDevices - IDEV009

Leviton – 6672

Leviton – 6674

Lutron - AYCL-153P

Lutron - TGCL-153-PH-WH

Lutron - AYLV-600P

Lutron - MAELV-601

Leviton -AWSMT-EAW

Lutron - N-600"

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.
Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.