


VS-106MB & VS-108MB

- Mounting: 3 point fixed with adjustment slots
- Tamper-proof gong bolt
- IEC 60533: 1999 Compliant for installation on ships
- EN 50130-4: 2011 Compliant for Alarm systems
- Dustproof and Weatherproof

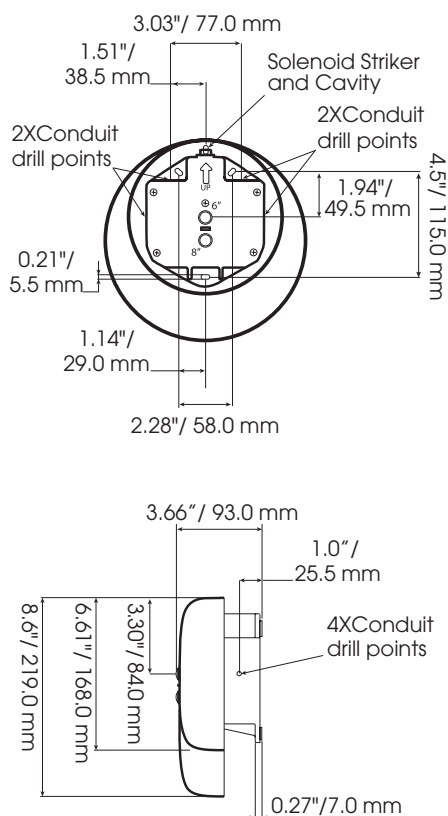

Models VS-106MB (6") and VS-108-MB (8") solenoid driven bells are designed and manufactured to withstand harsh environmental conditions. These models offer up to 4 x M20 cable entries, two (2) from above and one (1) from either side to allow for loop in/loop out cabling applications. Termination is inside the enclosure and can accommodate 4 x 2.5mm cables.

These models are ideally suited for heavy duty industrial & marine applications where rugged construction and a high weatherproof classification are required.

ORDERING INFORMATION

MODEL	COLOR	VOLTAGE	CURRENT
VS-106MB-12DC	Grey	12VDC	700 mA
VS-106MB-24DC	Grey	24VDC	400 mA
VS-106MB-24DCR	Red	24VDC	400 mA
VS-106MBR-24AC	Grey	24VDC	500 mA
VS-106MB-115AC	Grey	115VAC	110 mA
VS-106MB-230AC	Grey	230VAC	60 mA
VS-108MB-24DC	Grey	24VDC	400 mA
VS-108MB-24DCR	Red	24VDC	400 mA
VS-108MB-115AC	Grey	115VAC	110 mA
VS-108MB-230AC	Grey	230VAC	60 mA



1 Year
Warranty



1.6 Kg 3.52 Lbs VS-106
2.15 Kg 4.74 Lbs VS-108



50/60 Hz



66



96 db@10', 106 db@1m VS-106
98 db@10', 108 db@1m VS-108



ON 10 Min
OFF 30 Min