



- Rated for continuous use
- High light output
- VS-156ST: Suitable for surface, conduit box or wall mounting
- VS-205ST: Suitable for surface or wall mounting
- Optional wall bracket & dome guard available
- 360° light output around the vertical axis
- 180° light output above the horizontal axis
- Dustproof and Weatherproof

VS-156ST

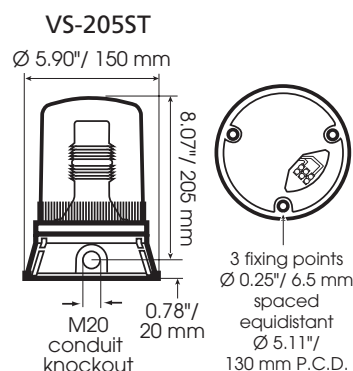

VS-205ST

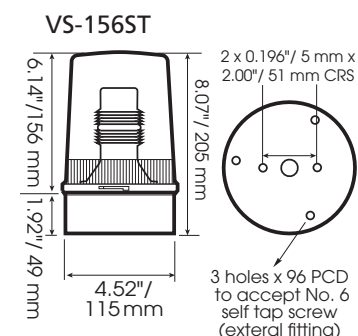

Available in the following colors:



OPTIONAL ACCESSORIES

VS-DG-L Dome Guard, Large
VS-MB-L Mounting Bracket, Large



Models VS-156ST and VS-205ST are ideal for security and general industrial signaling applications where a robust and powerful signal is required.

These flashing mode strobe beacons generate a very brief and very bright flash of white light. The design allows for termination inside the enclosure.

Models VS-156ST and VS-205ST incorporate a Fresnel lens designed to maximize the light intensity. It also offers a double flash option (activated by a slide switch on the PCB) that extends the signal duration. The DC unit is factory set at 24V, a slide switch on the PCB allows the user to configure to 12V operation.

ORDERING INFORMATION

MODEL	VOLTAGE	LIGHT SOURCE	CURRENT
VS-156ST-12-24* ¹	12/24VDC	10J / 7.5J	1.45 / 0.7 A
VS-156ST-115*	115VAC	10J / 7.5J	0.10 A
VS-156ST-230*	230VAC	10J / 7.5J	0.06 A
VS-205ST-12-24* ¹	12/24VDC	10J / 7.5J	1.45 / 0.7 A
VS-205ST-115*	115VAC	10J / 7.5J	0.10 A
VS-205ST-230*	230VAC	10J / 7.5J	0.06 A

¹ Pre-set at 24VDC

* Indicates color: (A) Amber, (B) Blue, (G) Green, (R) Red or (W) White



1 Year
Warranty



VS-156ST 0.72 Kg 1.58 Lbs
VS-205ST 0.82 Kg 1.81 Lbs



-25 to +55°C
-13°F to 131°F



65



60X90



50/60 Hz