


- Rated for continuous use
- Suitable for conduit box or wall mounting
- 120° prime light output above the vertical axis
- White back box
- VS-73STS = Shallow base
- Dustproof and Weatherproof

VS-73STS

VS-73ST

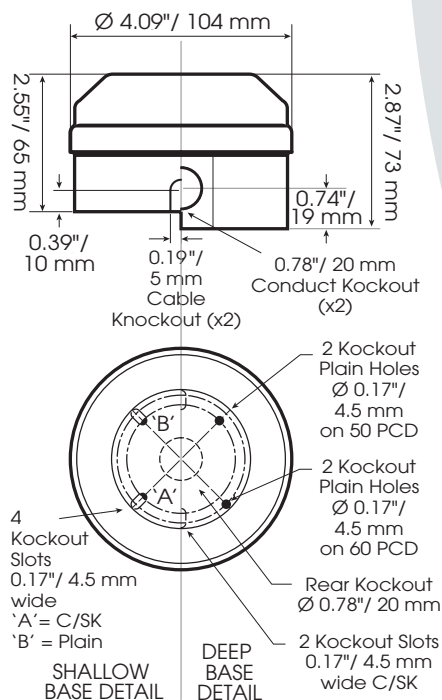

Models VS-73ST (deep base) & VS-73STS (shallow base) are controlled via a PCB board and put out a very brief, bright flash of white light by ionizing and then discharging a large current through the strobe gas. The design allows for termination inside the enclosure. Model VS-73ST (deep base) offers 2 x M20 entries and 1 x M20 rear entry. While model VS-73STS (shallow base) offers a lower profile and allows for 2 x 5mm cable entries on the side of the unit and 1 x M20 rear entry.

These models are suitable for security, process control & general industrial signaling applications.

ORDERING INFORMATION

MODEL	VOLTAGE	LIGHT SOURCE	CURRENT
VS-73STS-15-28*	15-28VAC/DC	5.0 J	110 mA
VS-73ST-15-28*	15-28VAC/DC	5.0 J	110 mA
VS-73STS-180-265*	180-265VAC	5.0 J	110 mA
VS-73ST-180-265*	180-265VAC	5.0 J	110 mA

* Indicates color: (A) Amber, (B) Blue, (G) Green, (R) Red or (W) White

Available in the following colors:



1 Year Warranty



0.25 Kg
0.55 Lbs



-25 to +45°C
-13°F to 113°F



65



60



50 Hz