



UF Direct Burial Splice Kits - Heat Shrink

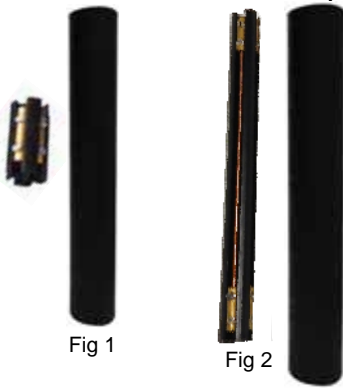

- ▶ Labor savings - simplifies splicing UF cable by obsoleting messy multi part splicing kits, Seal with heat gun or torch
- ▶ Provides a reliable, moisture proof electrical connection for UF cable
- ▶ 14/3 or 12/3 minimum to 8/3 maximum
- ▶ 67000 comes complete with one 4-position brass connector and one 8" piece of adhesive/sealant lined heat shrink tubing
- ▶ 67001 comes complete with 11-1/2" connector and one 20" piece of water impervious adhesive/sealant heat shrink tubing
- ▶ UL486D Listed Submersible & Raintight, 600 Volt 221°F (105°C)

Cat. No.	Fig	Description	Bag Qty
67000	1	14-8 AWG UF Direct Burial Splice Kit	1
67001	2	14-8 AWG UF Direct Burial Stretcher Splice Kit	1

Direct Burial UF In-Line Splice Kit - EPDM Rubber Cover

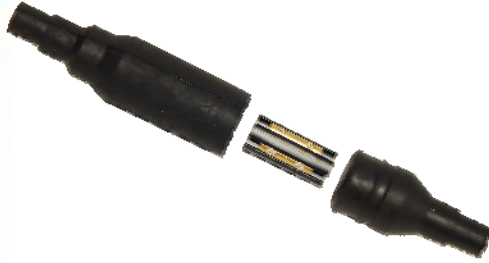

- ▶ Perfect for 14/2, 14/3, 12/2, 12/3, 10/2, 10/3 UF Cable Applications
- ▶ No Taping, Mixing, Mastics or Heat Gun Required
- ▶ Specially designed UF Adaptor Opening Molded into Cover
- ▶ Waterproof, Submersible & Re-Enterable, UV Resistant
- ▶ Connector Included

Cat. No.	Wire Range	Connector (Inches)		Cover (inches)		Case Qty
		Dia	L	Dia.	L	
67056	14/2 - 10/3	.86	1.81	1.63	8.31	5

Dual Rated Splice Kits - Heat Shrink



- ▶ Eliminates Expensive Crimping Tools when Splicing Aluminum or Copper Conductors for Direct Burial
- ▶ Kit comes complete with one mechanical connector and one piece of heat shrink tubing
- ▶ For Repair and/or Extending type USE or other Electrical Cable
- ▶ Seal with heat gun or torch
- ▶ UL Listed Components, 600 Volt maximum 221°F (105°C) rating

Cat. No.	Fig	Description	Bag Qty
67002	1	8-2 AWG Dual Rated Butt Splice	1
67004	1	6-1/0 AWG Dual Rated Butt Splice	1
67003	1	8-2/0 AWG Dual Rated Butt Splice	1
67005	1	3/0-250MCM AWG Dual Rated Butt Splice	1
67006	2	3/0-250MCM AWG Dual Rated Butt Splice	1

Mechanical Splice Kits - EPDM Rubber Cover



- ▶ Prevents oxidation and keeps out moisture
- ▶ Approved for use with Aluminum or Copper Conductors
- ▶ Direct Burial & Submersible - Ensure a fully insulated, Water-tight Splice Repair - No taping or Heat Shrink or mastic required
- ▶ Perfect for repairing any 2, 3, or 4-wire installation
- ▶ 600V, Meets or Exceeds C119.4, RUS Accepted

Cat. No.	Wire Range AWG	Screw Configuration	Connector (Inches)		Cover (inches)		Case Qty
			Dia.	L.	Dia.	L	
67058	#6 - 350 MCM	2 Screw	1.13	2.56	1.55	10.45	25
67060	#6 - 350 MCM	4 Screw	1.13	4.06	1.55	10.45	25

Direct Burial Splice Covers - EPDM Rubber



- ▶ For Direct Burial, Underground Vault, Overhead Service Splices
- ▶ Approved for Aluminum or Copper Conductors, Connector Not Included
- ▶ Ensures a Fully Insulated, Water-Tight Repair Splice - No Taping, Heat Shrink or Mastic Required, 600V, REA Approved

Cat. No.	Wire Range AWG	Wire Range Diameter	*Dimensions (inches)		Case Qty
			Dia.	L	
67052	#14 - 2/0	.15 - .60	1.01	5.97	250
67053	#14 - 350	.15 - .98	1.27	8.25	100
67054	#14 - 500	.15 - 1.175	1.55	10.45	100