


7 Mil Professional Grade Electrical Tape



Comparable to 3M 33+ & 35

- ▶ 3/4" X 66Ft X 7Mil
- ▶ All Weather Professional Grade Splicing Tape used as Primary Insulation up to 600V and as a Protective Outer Jacket up to 69KV
- ▶ Flame Retardant & Weather Resistant
- ▶ Excellent Cold Weather Resistant Properties -1°F to 221°F (-18°C to 105°C)
- ▶ High Dielectric Strength, High Adhesion and Shear
- ▶ Highly Elastic Polymeric Vinyl Backing - Excellent Elongation
- ▶ Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- ▶ UL 510 & CSA 22.2 Approved
- ▶ ASTM-D-3005 HH-I-595C
- ▶ Lead Free

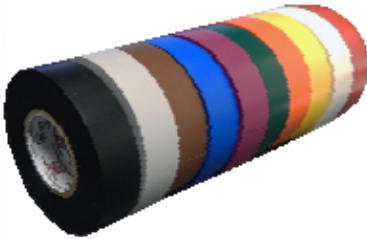

Cat. No.	Color	Size	Packaging Type	Case Qty
60110	Black	3/4" X 66Ft	Plastic Cup	100
60111	Red	3/4" X 66Ft	Plastic Cup	100
60112	White	3/4" X 66Ft	Plastic Cup	100
60113	Yellow	3/4" X 66Ft	Plastic Cup	100
60114	Green	3/4" X 66Ft	Plastic Cup	100
60115	Blue	3/4" X 66Ft	Plastic Cup	100
60116	Brown	3/4" X 66Ft	Plastic Cup	100
60117	Orange	3/4" X 66Ft	Plastic Cup	100
60118	Gray	3/4" X 66Ft	Plastic Cup	100
60119	Violet	3/4" X 66Ft	Plastic Cup	100

8.5 Mil Professional Grade Heavy Duty Electrical Tape



Comparable to 3M Super 88

- ▶ 3/4" X 66Ft X 8.5Mil
- ▶ Heavier thickness for added mechanical & electrical protection
- ▶ All Weather Professional Grade Splicing Tape used as Primary Insulation up to 600V and as a Protective Outer Jacket up to 69KV
- ▶ Flame Retardant & Weather Resistant
- ▶ Excellent Cold Weather Resistant Properties -1°F to 221°F (-18°C to 105°C)
- ▶ High Dielectric Strength, High Adhesion and Shear
- ▶ Highly Elastic Polymeric Vinyl Backing - Excellent Elongation
- ▶ Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- ▶ UL 510 & CSA 22.2 Approved
- ▶ ASTM-D-3005 HH-I-595C
- ▶ Mil Spec Approved - MIL-I-24391C
- ▶ Lead Free

Cat. No.	Color	Size	Packaging Type	Case Qty
60205	Black	3/4" X 66Ft	Plastic Cup	100
60206	Black	2" X 66Ft	Cello	40
60207	Black	2' X 108Ft	Cello	40