


90° Liquid Tight Connectors - Insulated Throat - Zinc Die Cast



- ▶ 90° Orientation
- ▶ Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- ▶ Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided

Dimensions = Inches

Cat. No.	Trade Size	Dimensions			Inner Box	Outer Box
		A	B	C		
15291	3/8"	.56	1.30	2.09	15	150
15292	1/2"	.56	1.30	2.15	15	150
15293	3/4"	.73	1.57	2.69	10	100
15294	1"	.93	1.81	2.98	5	50
15295	1-1/4"	1.22	1.46	3.40	4	40
15296	1-1/2"	1.46	2.50	3.80	2	20
15297	2"	1.87	3.01	4.27	1	10
15298	2-1/2"	2.32	3.72	5.39	-	6
15299	3"	2.93	4.33	6.13	-	4
15300	3-1/2"	3.33	4.86	6.55	-	3
15301	4"	3.86	5.24	6.98	-	3

Non-Metallic Liquid Tight Connectors - Straight





- ▶ Terminate and Seal Non-Metallic Liquid-tight Conduit
- ▶ Nylon Construction with Zinc Die-Cast Locknut
- ▶ UV Resistant

Dimensions = Inches

Cat. No.	Trade Size	Dimensions		Inner Box	Outer Box
		A	B		
21812	3/8"	2.02	1.29	25	100
21813	1/2"	2.11	1.43	25	150
21814	3/4"	2.30	1.70	10	100
21815	1"	2.26	1.91	5	50
21816	1-1/4"	2.70	2.40	5	50
21817	1-1/2"	2.76	2.70	4	40
21818	2"	2.81	3.39	2	20

Non-Metallic Liquid Tight Connectors - 90°

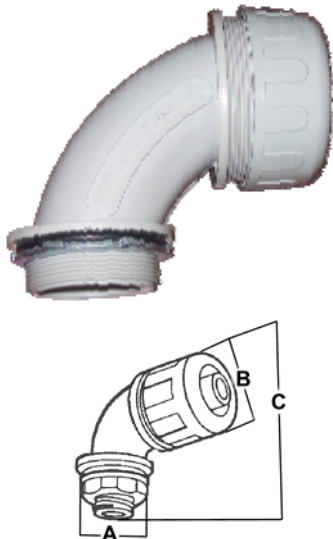

- ▶ 90° Orientation
- ▶ Terminate and Seal Non-Metallic liquid-tight Conduit
- ▶ Nylon Construction with Zinc Die-Cast Locknut
- ▶ UV Resistant

Dimensions = Inches

Cat. No.	Trade Size	Dimensions			Inner Box	Outer Box
		A	B	C		
21822	3/8"	.79	1.43	2.28	-	100
21823	1/2"	.80	1.43	2.39	25	150
21824	3/4"	1.00	1.70	2.52	10	100
21825	1"	1.28	1.91	2.74	5	50
21826	1-1/4"	1.64	2.40	4.31	3	30
21827	1-1/2"	1.88	2.70	4.55	2	20
21828	2"	2.37	3.39	4.88	1	10