


Wedge Clamps

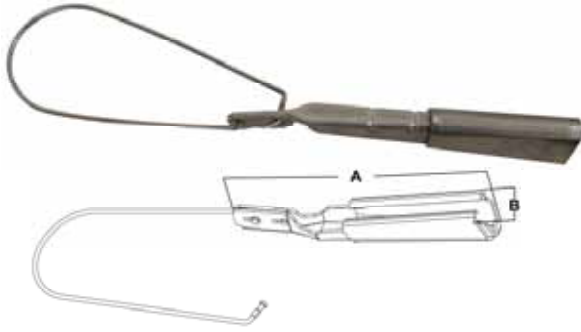

- ▶ Designed to hold triplex overhead service-entrance cable to a mounting structure
- ▶ Aluminum wedge and shell with a stainless-steel ball
- ▶ Can be used indoors or outdoors
- ▶ Corrosion resistant
- ▶ Installs quickly and easily

Dimensions = Inches

Cat. No.	ACSR Range	Dimensions		Box Qty
		A	B	
28881	#6-#2	5.94	.85	50
28882	#4-1/0	7.21	1.04	25
28883	2/0-4/0	7.21	1.22	25

Wire Rope Clip - Guy Wire




- ▶ For Guy Wire
- ▶ Malleable Iron
- ▶ Galvanized

Dimensions = Inches

Cat. No.	Trade Size	Dimensions		Box Qty
		A	B	
17302	1/4"	1.50	0.25	50

PVC Sill Plates

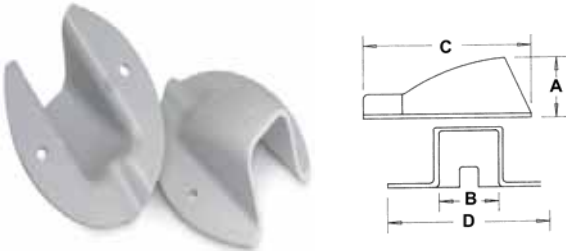

- ▶ Covers service cable where it bends to enter the building for an attractive finish
- ▶ May be used on all cable sizes from three #4 to three 1/0
- ▶ Unaffected by seasonal temperature extremes
- ▶ Costs less than heavier metal types

Dimensions = Inches

Cat. No.	Wire Size	Dimensions				Box Qty
		A	B	C	D	
21768	(3)#4 to (3)1/0	1.15	1.07	3.00	2.93	250

Steel Snap-In Blanks



- ▶ For use in closing off unused openings in boxes or panel boards
- ▶ All steel construction provides installation integrity
- ▶ Snap-Fit Design

Dimensions = Inches

Cat. No.	Trade Size	Dimensions		Inner Box	Outer Box
		A	B		
21800	1/2"	1.08	.29	100	1000
21801	3/4"	1.23	.31	100	1000
21802	1"	1.47	.34	100	1000
21803	1-1/4"	1.88	.37	50	500
21804	1-1/2"	2.22	.31	50	500
21805	2"	2.67	.34	10	100

Type S With Screw and Bar Knockout Seals



New! Available November 2014

- ▶ Set screw/bar type knockout seals are inserted in open box knockouts to protect exposed wires
- ▶ Used in standard, air tight or dust tight applications
- ▶ Pre-assembled screw and backer bar slides on open knockout holes without removing box devices or covers
- ▶ Steel Galvanized

Dimensions = Inches

Cat. No.	Trade Size	Dimensions		Inner Box	Outer Box
		A	B		
21790	1/2"	1.20	.27	100	500
21791	3/4"	1.39	.32	100	500
21792	1"	1.66	.28	50	500
21793	1-1/4"	2.10	.33	50	500
21794	1-1/2"	2.46	.33	10	300
21795	2"	2.94	.34	10	300
21796	2-1/2"	3.75	.34	-	100
21797	3"	4.51	.34	-	100
21798	3-1/2"	5.01	.344	-	100
21799	4"	5.50	.34	-	100