

- ▶ Rugged Nylon/Polycarbonate Construction resists impact, abrasion, sunlight & chemicals
- ▶ Grooved Housing for enhanced grip
- ▶ All contacts are solid one-piece brass for superior conductivity and reduced heat rise
- ▶ Heavy duty power contacts set in deep pockets to resist damage
- ▶ Heavy duty brass combo head terminal screws
- ▶ Clear terminal chamber allows for visual inspection of terminals
- ▶ Cord strain relief and rubber grommet to seal from environment
- ▶ Includes grounding screw

2 Pole 3 Wire



Fig 1

Fig 2

3 Pole 4 Wire



Fig 3

Fig 4

Cat. No.	Male/Female	Figure	Amps	Volts	NEMA#	Box Qty	Master Box Qty
89729	Male	1	15	125	L5-15P	50	200
89730	Female	2	15	125	L5-15R	50	200
89731	Male	1	15	250	L6-15P	50	200
89732	Female	2	15	250	L6-15R	50	200
89733	Male	1	20	125	L5-20P	10	100
89734	Female	2	20	125	L5-20R	10	100
89746	Male	1	20	250	L6-20P	10	100
89747	Female	2	20	250	L6-20R	10	100
89748	Male	1	30	125	L5-30P	10	100
89749	Female	2	30	125	L5-30R	10	100
89750	Male	1	30	250	L6-30P	10	100
89751	Female	2	30	250	L6-30R	10	100

Cat. No.	Male/Female	Figure	Amps	Volts	NEMA#	Box Qty	Master Box Qty
89752	Male	3	20	125/250	L14-20P	10	100
89754	Female	4	20	125/250	L14-20R	10	100
89755	Male	3	20	250	L15-20P	10	100
89757	Female	4	20	250	L15-20R	10	100
89756	Male	3	30	125/250	L14-30P	10	100
89758	Female	4	30	125/250	L14-30R	10	100
89760	Male	3	30	250	L15-30P	10	100
89761	Female	4	30	250	L15-30R	10	100

Straight Blade Plugs and Receptacles

2 Pole 3 Wire



Fig 1

Fig 2

- ▶ Rugged Nylon Construction resists impact, abrasion, sunlight & chemicals
- ▶ Grooved Housing for Enhanced Grip
- ▶ All contacts are solid one-piece brass for Superior Conductivity and Reduced Heat Rise
- ▶ Heavy duty contacts set in deep pockets to resist damage
- ▶ Heavy duty brass combo head terminal screws
- ▶ Clear terminal chamber allows for visual inspection of terminals
- ▶ Cord strain relief and rubber grommet to seal from environment
- ▶ Includes grounding screw

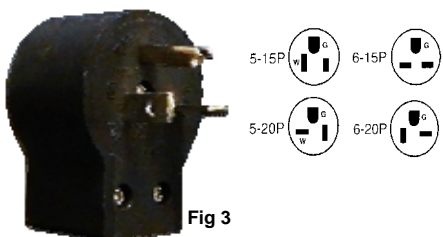


Fig 3

Cat. No.	Male/Female	Figure	Amps	Volts	NEMA#	Box Qty	Master Box Qty
89612	Male	1	15	125	5-15P	50	200
89613	Female	2	15	125	5-15R	50	200
89614	Male	1	20	125	5-20P	50	200
89615	Female	2	20	125	5-20R	50	200
89616	Male	1	15	250	6-15P	50	200
89617	Female	2	15	250	6-15R	50	200
89618	Male	1	20	250	6-20P	50	200
89619	Female	2	20	250	6-20R	50	200

Right Angle Plugs

89632	Male	3	15	125	5-15P	10	200
89634	Male	3	20	125	5-20P	10	200
89636	Male	3	15	250	6-15P	10	200
89638	Male	3	20	250	6-20P	10	200