



SPECIFICATIONS
AKFD2
 EXHAUST FAN HOUSING

Fire Rated Damper

- **Blanket**

Non-asbestos, ceramic blanket.

- **Fusible Link**

Replaceable, 165°F standard.

- **Classification**

CUL Listed 555C and 263. California State Marshall classification for 1 hour fire damper rating. California State Marshall listing number 3225-1374-101.

- **Available Trim Kits / Housing**

FAK50T: 50 CFM, ENERGY STAR® certified

FAK80T: 80 CFM, ENERGY STAR® certified

FAK90T: 90 CFM, ENERGY STAR® certified

FAK100T: 100 CFM, ENERGY STAR® certified

FAK110T: 110 CFM


FAK130T: 130 CFM

AKFH2: Housing

- **Shipping Info**

Number of Housings in Box: 4

UPC Code: 083162272812

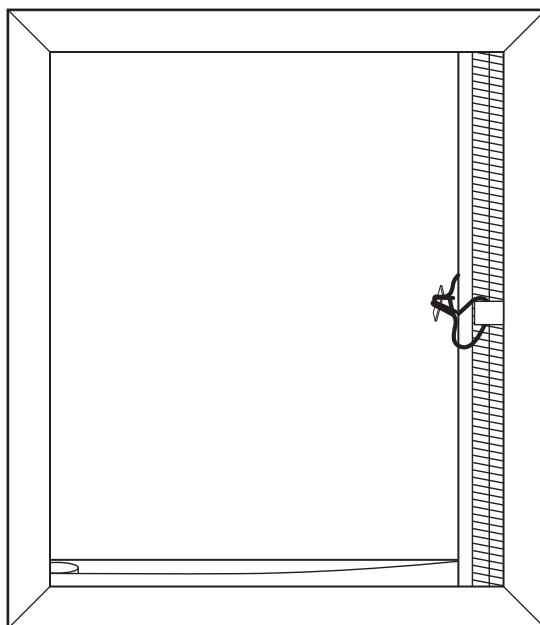

Damper ONLY. Must be combined with AKFH2 housing and FAKT series trim kit (sold separately)

PROJECT							ARCHITECT		
LOCATION							ENGINEER		
CONTRACTOR							SUBMITTED BY		DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048