



SPECIFICATIONS  
**AKFH2**  
EXHAUST FAN HOUSING

## Fire Rated Exhaust Fan Housing

- Fan Housing**

24 gauge galvanized steel housing.  
Dimensions 10<sup>3</sup>/<sub>4</sub>" x 9<sup>1</sup>/<sub>4</sub>" x 7<sup>7</sup>/<sub>8</sub>".

- Duct Collar**

Metal collar for 4" duct connection, comes complete with built in back draft damper.

- Unit Mounting**

Unit is centered between joists (with 16" centers) using hanging brackets. The housing will mount through drywall thickness up to <sup>3</sup>/<sub>4</sub>", with a rough-in opening of 10<sup>3</sup>/<sub>4</sub>" x 9<sup>1</sup>/<sub>4</sub>".

- Electrical Connections**

<sup>1</sup>/<sub>2</sub>" electrical knockouts provided.


Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- Available Trim Kits**

**FAK50T:** 50 CFM, ENERGY STAR® certified  
**FAK80T:** 80 CFM, ENERGY STAR® certified  
**FAK90T:** 90 CFM, ENERGY STAR® certified  
**FAK100T:** 100 CFM, ENERGY STAR® certified  
**FAK110T:** 110 CFM  
**FAK130T:** 130 CFM

- Shipping Info**

Number of Housings in Box: 4  
UPC Code: 083162224316

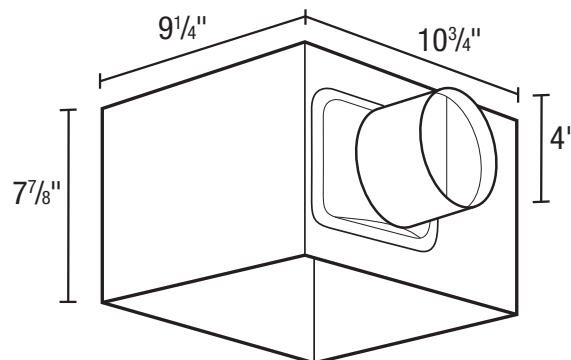

**Housing ONLY. Must be combined with AKFD2 damper and FAKT series trim kit (sold separately)**

<b>PROJECT</b>							<b>ARCHITECT</b>		
<b>LOCATION</b>							<b>ENGINEER</b>		
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>		<b>DATE</b>
<b>FAN NUMBER</b>	<b>MODEL NUMBER</b>	<b>CFM</b>	<b>IN W.G.</b>	<b>RPM</b>	<b>WATTS</b>	<b>AMPS</b>	<b>SONES</b>	<b>QTY</b>	<b>OPTIONAL EQUIPMENT &amp; REMARKS</b>



820 Lincoln Avenue  
West Chester, Pennsylvania 19380-4466  
Tel: (610) 692-7400 • 877-304-3785  
Fax: (610) 696-8048