


# Insulated Roof Curbs

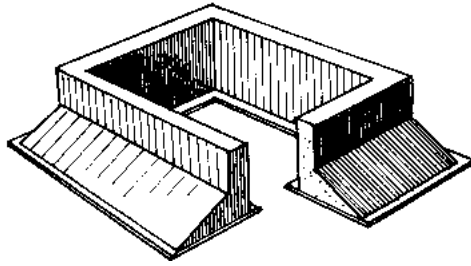

## Features

- Used with UEB, UED, and RE roof ventilators
- For flat, single slope or ridge style roofs
- Galvanized steel construction
- 1 1/2" insulated thickness, 3 pounds density
- 8" height overall
- Not for corrugated roofs

## Standard Models

FAN	MODEL			BASE DIMENSION	OVERALL DIMENSION	LIST		
	FLAT	SLOPE	RIDGE			FLAT	SLOPE	RIDGE
18"	FLS-18	SLS-18	RDS-18	32" x 32"	44" x 44"	460	889	1048
24"	FLS-24	SLS-24	RDS-24	38" x 38"	50" x 50"	533	1018	1195
30"	FLS-30	SLS-30	RDS-30	44" x 44"	56" x 56"	601	1141	1349
36"	FLS-36	SLS-36	RDS-36	50" x 50"	62" x 62"	657	1251	1441
42"	FLS-42	SLS-42	RDS-42	56" x 56"	68" x 68"	724	1373	1625
48"	FLS-48	SLS-48	RDS-48	62" x 62"	74" x 74"	975	1845	2188
54"	FLS-54	SLS-54	RDS-54	68" x 68"	80" x 80"	1055	2005	2373
60"	FLS-60	SLS-60	RDS-60	74" x 74"	86" x 86"	1153	2182	2582

## Back Draft Dampers to Fit in Curb

UEB and UED models require higher curb height when used with back draft damper-consult factory.

FAN SIZE	MODEL	SHUTTER SIZE	LIST
18"	CD-18	28" x 28"	611
24"	CD-24	34" x 34"	712
30"	CD-30	40" x 40"	982
36"	CD-36	46" x 46"	1215
42"	CD-42	52" x 52"	1341
48"	CD-48	58" x 58"	1628
54"	CD-54	64" x 64"	2041
60"	CD-60	70" x 70"	2220

## Motor Kit

115V or 230V, 60Hz, 1-Phase. (Specify Voltage)

MODEL	DESCRIPTION	SHIPPING WT. (LBS)	LIST
DMKP1	For shutter sizes 18" thru 36"	5	557
DMKP2	For shutter sizes 42" thru 60"	8	664