

## LB Series - Bi-Metal In-Built Thermostats



LB110



LB210



### Features

- Bi-Metal sensor
- HP Ratings: 3/4HP @ 125 VAC - 1.5HP @ 250-277 VAC
- 22 Amps resistive max

| MFG CATALOG NUMBER                                                            | MFG MODEL NUMBER | DESCRIPTION    | VOLTAGE     | RANGE     | CONNECTIONS         |
|-------------------------------------------------------------------------------|------------------|----------------|-------------|-----------|---------------------|
| 05361302                                                                      | LB110            | SPST Heat Only | 120-277 VAC | 0 - 110°F | 6" - 14 Gauge Leads |
| 05362002                                                                      | LB210            | DPST Heat Only |             |           | 6" - 14 Gauge Leads |
| Master Carton: 16" x 14.5" x 6", Qty 25-50, 11lbs.-14lbs. depending on model. |                  |                |             |           |                     |

## LR Series - Bi-Metal Outdoor Thermostats



LRD100A



### Features

- Bi-Metal sensor
- HP Ratings: 3/4HP @ 125 VAC - 1.5HP @ 250-277 VAC
- 22 Amps resistive max

| MFG CATALOG NUMBER                                                         | MFG MODEL NUMBER | DESCRIPTION    | VOLTAGE     | RANGE     | CONNECTIONS         |
|----------------------------------------------------------------------------|------------------|----------------|-------------|-----------|---------------------|
| 05363002                                                                   | LRD100A          | SPDT Heat/Cool | 120-277 VAC | 0 - 110°F | 6" - 14 Gauge Leads |
| Master Carton: 16" x 14.5" x 6", Qty 50, 15lbs.-16lbs. depending on model. |                  |                |             |           |                     |

## RH Series - Air Flow / Differential Pressure Switch Controls



RH1505D0



RH3, RH35, RH3A




### Features

- Senses pressure or vacuum
- Adjustable or fixed pressure
- Compliant with RoHS2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.
- Automatic reset
- Tube, barbed, or compression fittings


| MFG CATALOG NUMBER                                                                                                                                           | MFG MODEL NUMBER | PRESSURE SET | VOLTAGE     | RANGE           | CONNECTIONS              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------|-------------|-----------------|--------------------------|
| 05460702                                                                                                                                                     | RH1505D0         | Fixed        | 120-277 VAC | 0.05" WC        | Tube (both sides)        |
| 05462102                                                                                                                                                     | RH3              | Adjustable   |             | 0.05" - 12" WC  | Bardbed (both sides)     |
| 05462302                                                                                                                                                     | RH35             | Adjustable   |             | 0.05" - 2.0" WC | Barbed (both sides)      |
| 05463102                                                                                                                                                     | RH3A             | Adjustable   |             | 0.05" - 12" WC  | Compression (both sides) |
| Master Carton (RH1505D0): 25.5" x 17.75" x 13.5", Qty 48, 36lbs<br>Master Carton (RH3, RH35, RH3A): 15.25" x 15" x 14", Qty 24, 28-32lbs depending on model. |                  |              |             |                 |                          |

## Pilot Tubes (for RH Series Air Flow / Differential Pressure Switch Controls)


1

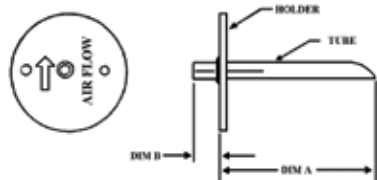

2

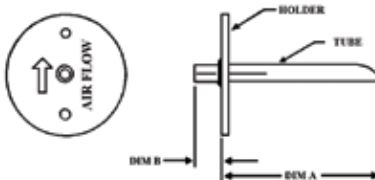

3

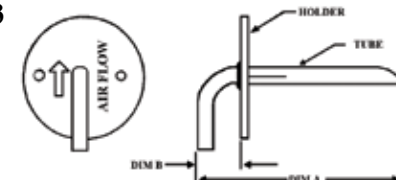

| MFG CATALOG NUMBER | MFG MODEL NUMBER | "A" DIMENSION | "B" DIMENSION | FIGURE # |
|--------------------|------------------|---------------|---------------|----------|
| 94227000           | 61-01730-00      | 4.29"         | 0.69"         | 1        |
| 94227003           | 61-01730-003     | 6.69"         | 0.69"         | 1        |
| 94228000           | 61-01729-00      | 4.00"         | 0.50"         | 2        |
| 94228020           | 61-01729-20      | 2.00"         | 0.50"         | 2        |
| 94228021           | 61-01729-21      | 1.50"         | 0.50"         | 2        |
| 94228022           | 61-01729-22      | 6.00"         | 0.50"         | 2        |
| 94228027           | 61-01729-27      | 3.50"         | 0.50"         | 3        |