


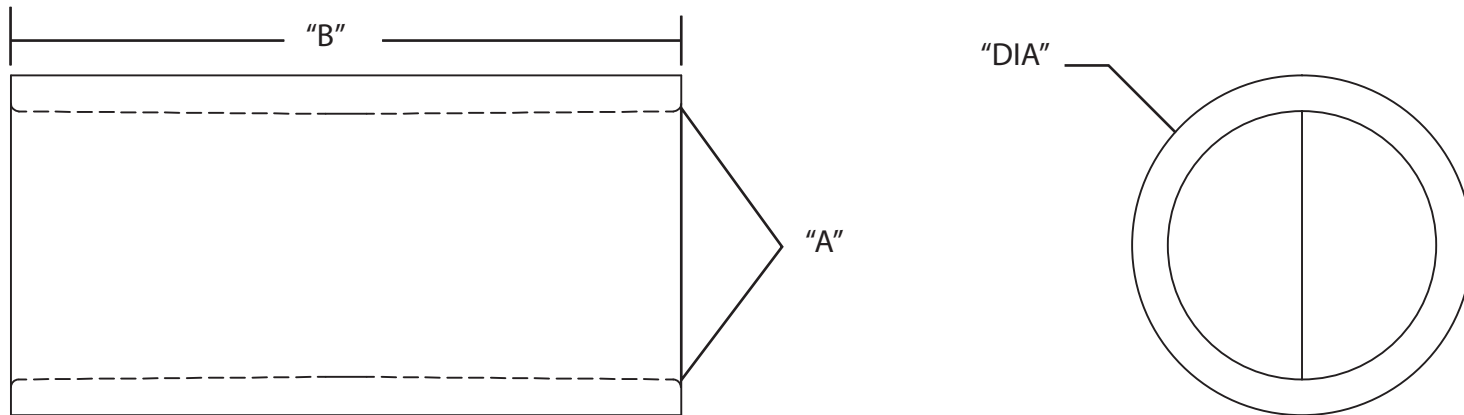

FABRICATED COUPLINGS W/O CENTER STOP

Size	Number	Inside Diameter Average	O.O.R.*	Length (Approx.)
1 ½"	6121622	1.921"±.006"	±.030"	5"
2"	6121623	2.400"±.006"	±.030"	6"
3"	6121625	3.538"±.008"	±.040"	6"
4"	6121626	4.544"±.009"	±.050"	6 ¾"
5"	6121627	5.614"±.010"	±.050"	7"
6"	6121635	6.687"±.011"	±.050"	7 ¼"
O.O.R.—"Out of Round" is calculated by the maximum diameter minus the minimum diameter				

CANTEX
INC.
FORT WORTH, TEXAS

Couplings

Dr.By: T.P. MORRISSEY Date: 04/08/98