

Ferron Collection

60 Inch Ferron Ceiling Fan OBB

300160OBB (Oil Brushed Bronze)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Product Information

Product ID	300160OBB
Finish	Oil Brushed Bronze
Blade Finish	Oil Brsh Bronze/Non-Reversible
Collection	Ferron Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	120	6785	220	.43	31
Med	75	3507	377	.14	9
Low	48	2368	526	.07	5

Specifications

Number of Blades	2
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	POLYCARBONATE
Optional Blades Available	No
Downrod 1	1.00 OD X 6.00


Primary Control System	6 Speed Dc Cooltouch - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	125
Motor Type	DC

Downlight

Downlight Bulb Included	Not Included
Glass Description	N/A
Optional Light Kit Available	No



Dimensions

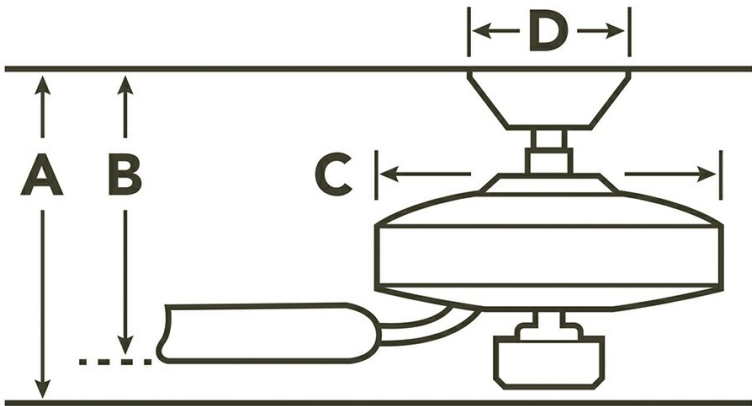

Downrod	A	B	C	D
1.00 OD X 6.00	15.92	15.37	7.25	5.90

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Ferron Collection

60 Inch Ferron Ceiling Fan OBB

300160OBB (Oil Brushed Bronze)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Oil Brushed Bronze	300160OBB	N/A	OIL BRS BRONZE	NON-REVERSIBLE
Polished Nickel	300160PN	N/A	CHAMPAGNE	NON-REVERSIBLE

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	16.7 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet