PW Ladder Cable Tray
Straight Section

4A12C
4"(H) Side Rail Tray

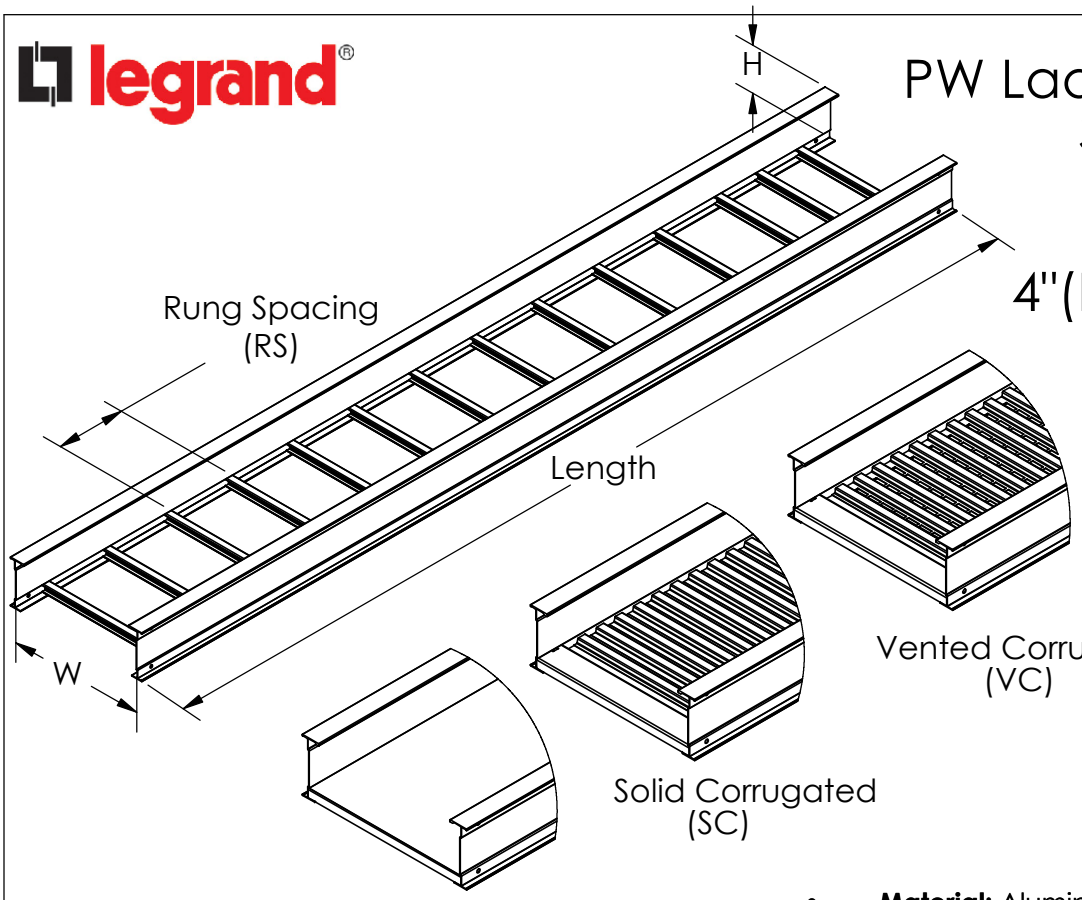

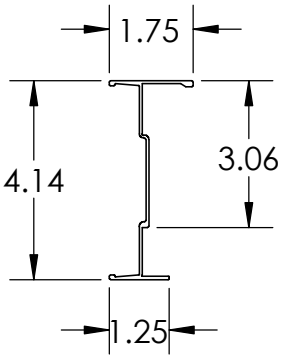

Overall Width: W + 1.5"

Tray Width (W)	Tray Weight * (LBS./FT.)
6	1.51
9	1.58
12	1.66
18	1.81
24	2.12
30	2.31
36	2.50

* Based on 9" rung spacing

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
  SB: Flat Sheet over 12" Rung Spacing.
  SC:Solid Corrugated
  VC: Vented Corrugated
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 1200 ampere rating. UL Cross Sectional area: 1.00 in²
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
  One rail: Ix-x = 1.418 in⁴, Sx-x = 0.646 in³

SUPPORT SPAN (FT.)													
6	8	10	12	14	16	18	20	22	24	26	28	30	
SAFE LOAD DATA (LBS./FT.)/ DEFLECTION (IN.) / SAFTEY FACTOR 1.5													
400	0.49	225	0.86	144	1.35	100	1.94	71	2.64	52	3.45		

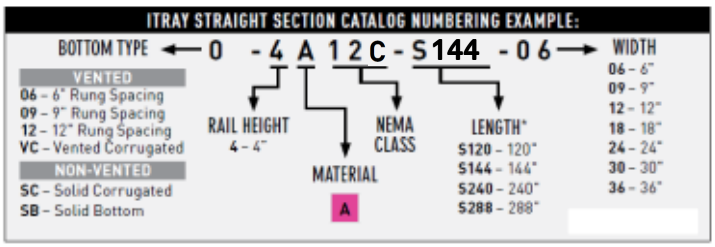

Legrand
8319 State Route 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil

Copyright © 2013 Cablofil, Inc.

CABCS1106 - IT 4A12C