



# T&B Portable Cord Fittings

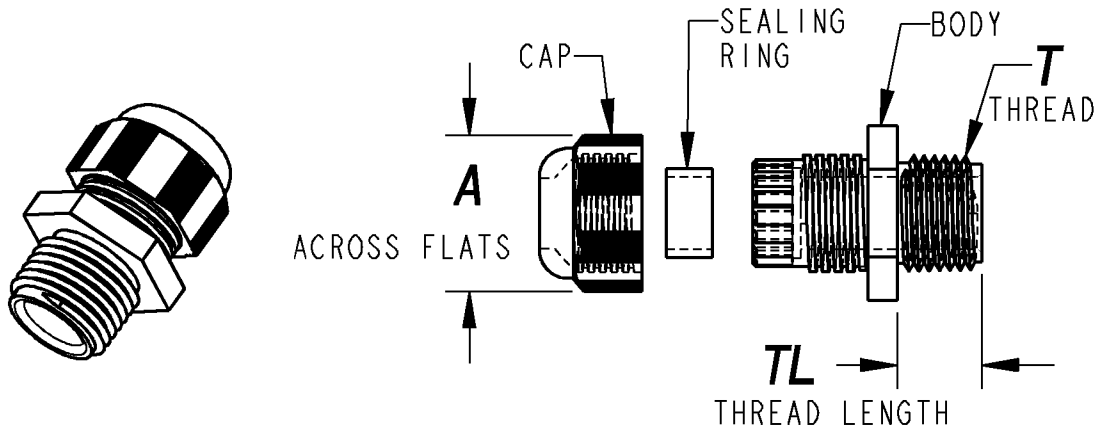

MATERIAL: BODY AND CAP- POLYANIDE 6  
 SEALING RING: NEOPRENE  
 COLOR: GRAY (RAL 7001)  
 BLACK (RAL 9005)  
 PROTECTION CLASS: IP 68, 5 BAR  
 TEMPERATURE RANGE: -30°C TO 80°C PERMANENT  
 OPERATING TEMPERATURE: UP TO +150°C INTERMITTENT

CATALOG NUMBER	SIZE	COLOR	NUMBER HOLES	MAXIMUM	MINIMUM	ACROSS FLATS	THREAD	THREAD LENGTH
				CLAMPING RANGE				
CC-NPT34-G4	3/4"	GRAY	4	.290	.230	1.299	3/4-14 NPT	.590
CC-NPT34-G3	3/4"	GRAY	3	.290	.230	1.299	3/4-14 NPT	.590
CC-NPT34-G2	3/4"	GRAY	2	.290	.230	1.299	3/4-14 NPT	.590
CC-NPT12-G3	1/2"	GRAY	3	.250	.190	1.063	1/2-14 NPT	.590
CC-NPT12-G2	1/2"	GRAY	2	.250	.190	1.063	1/2-14 NPT	.590

<b>GENERAL NOTES</b>		 www.tnb.com			
1. DIMENSIONS IN PARENTHESES ( ) ARE IN METRIC UNITS. 2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.					
<b>REVISIONS</b>		<b>DESCRIPTION:</b> <b>NONMETALLIC MULTI-HOLE CABLE GLAND</b>			
SEE ERN ( ) FOR APPROVAL SIGNATURES PROJECT NO:		ORIGINAL PROJECT NO / ( ERN NO ) RM401858/ (2008553)	SHEET NO: 1 OF 1	REV. NO: -	DRAWING NO: WSD-000375