


Slip-Thru Thimbles, 745-S Hot Rolled, Mild Steel



Style	B		C		D		F		L		P (max pin dia.)		R		W	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
2	3 ⁷ / ₈	98	1 ³ / ₄	44	1/2	13	7/64	3	5 ¹ / ₈	130	1 ¹¹ / ₁₆	43	3/4	19	3 ¹ / ₄	83
3	4 ⁷ / ₈	124	2 ¹ / ₄	57	1 ¹ / ₁₆	17	5/32	4	6 ¹ / ₂	165	2 ³ / ₁₆	56	1	25	4 ¹ / ₂	114
4	5 ⁷ / ₈	149	2 ⁹ / ₁₆	65	1 ³ / ₁₆	21	1 ¹ / ₆₄	4	8 ³ / ₁₆	208	2 ¹ / ₂	64	1 ³ / ₁₆	30	5 ¹ / ₈	130
4-Spec	7 ⁵ / ₈	194	3 ⁵ / ₈	92	1 ³ / ₁₆	21	3/16	5	9 ¹⁵ / ₁₆	252	3 ⁹ / ₁₆	90	1 ³ / ₁₆	30	6 ³ / ₈	162

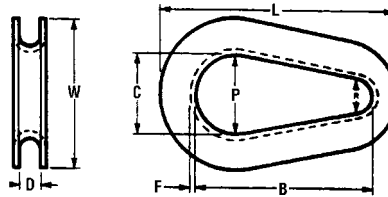

ADVERTENCIA

Para prevenir la posibilidad de lesiones graves:

- **NO EXCEDA** el límite de carga de trabajo (WLL).
- **NO LA UTILICE** choque o golpee la carga.
- **NO USE** el accesorio si se ve deformado o desgastado.



WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limit.
- **DO NOT** shock or impact load.
- **DO NOT USE** if the fitting is visibly distorted or worn.