

PVC Coated Form Fittings - LB Form 7

Calbond offers the full line of Form 8 and Form 7 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.


Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws
- Sealing sleeves extend 1 pipe diameter or 2 inches, whichever is greater, beyond all female openings



Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18

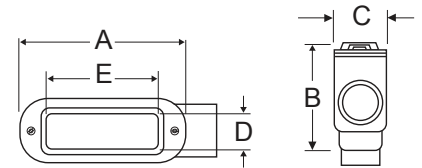

UL Listings and Compliances:

- Ferrous electrical conduit / File # DYIX.E226472
- Ferrous electrical conduit with PVC coating / File # DYJC.E226472

LB Form 7									
Item Number	Trade Size	Size Metric (mm)	A	B	C	D	E	Weight Per 100 (lbs)	Aluminum Item Number
PV0500LB17	1/2"	16	5.10	2.29	1.42	0.94	3.19	110	PA0500LB17SA
PV0700LB27	3/4"	21	5.98	2.54	1.60	1.13	3.81	170	PA0700LB27SA
PV1000LB37	1"	27	7.01	2.92	1.79	1.38	4.50	220	PA1000LB37SA
PV1200LB47	1-1/4"	35	7.79	3.35	2.23	1.75	5.00	310	PA1200LB47SA
PV1500LB57	1-1/2"	41	8.67	3.73	2.48	1.94	5.44	380	PA1500LB57SA
PV2000LB67	2"	53	10.17	4.29	3.04	2.44	6.38	520	PA2000LB67SA
PV2500LB777	2-1/2"	63	12.54	5.17	4.29	3.56	8.38	1000	PA2500LB777SA
PV3000LB87	3"	78	12.54	5.92	4.29	3.56	8.38	1300	PA3000LB87SA
PV3500LB97	3-1/2"	91	14.73	6.60	5.29	4.50	10.25	1900	PA3500LB97SA
PV4000LB107	4"	103	14.73	7.10	5.29	4.50	10.25	1850	PA4000LB107SA