

## PVC Coated Form Fittings - LL Form 8

Calbond offers the full line of Form 8 and Form 7 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

### Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws




### Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18

### UL Listings and Compliances:

- Ferrous electrical conduit / File # DYIX.E226472
- Ferrous electrical conduit with PVC coating / File # DYJC.E226472

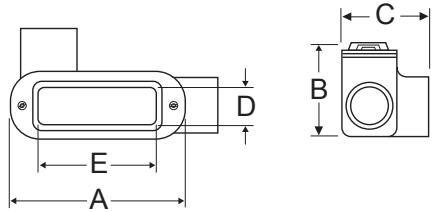

LL Form 8		Size Metric (mm)	A	B	C	D	E	Weight Per 100 (lbs)	Aluminum Item Number
Item Number	Trade Size								
PV0500LL18	1/2"	16	5.48	1.48	2.20	1.00	3.31	140	PA0500LL19
PV0700LL28	3/4"	21	6.35	1.73	2.35	1.19	3.94	210	PA0700LL29
PV1000LL38	1"	27	7.51	1.98	2.67	1.38	4.56	260	PA1000LL39
PV1200LL48	1-1/4"	35	8.82	2.42	3.20	1.75	5.31	420	PA1200LL49
PV1500LL58	1-1/2"	41	10.67	2.82	4.04	2.13	6.50	620	PA1500LL59
PV2000LL68	2"	53	13.04	3.60	5.04	3.00	8.56	1050	PA2000LL69
PV2500LL78	2-1/2"	63	15.98	4.48	6.73	4.25	10.88	1900	PA2500LL789
PV3000LL88	3"	78	15.98	4.85	6.73	4.25	10.88	2150	PA3000LL889
PV3500LL98	3-1/2"	91	14.73	1.92	6.98	4.50	10.25	2150	PA3500LL989
PV4000LL108	4"	103	14.73	5.42	6.98	4.50	10.25	2450	PA4000LL1089