


# ASCH

## PORTABLE MULTIPURPOSE HEATER

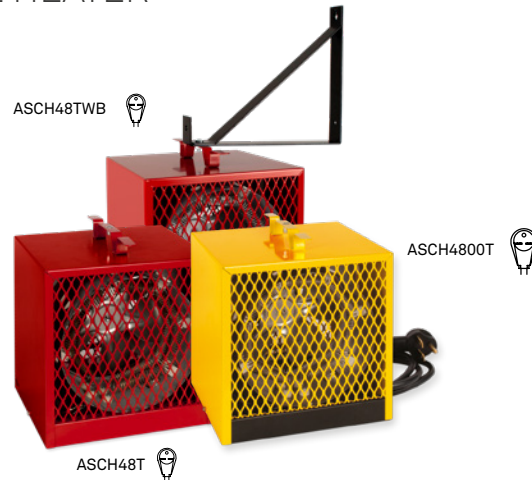

## EFFICIENT, SAFE AND VERSATILE

Any construction worker will tell you that the ASCH is the fast-acting heating unit most often found on construction sites, hence its nickname: “the construction heater.” Housed in a 20-gauge steel casing, it features a rugged protective grille and nichrome element for instant heat at start-up. Despite its small size, this heating powerhouse boasts 4800 W. The ASCH can be placed on the ground or against a wall, using a support bracket, available as an option. This heater is right at home on construction sites and in workshops and garages. Choose the ASCH when you need rapid, reliable heat.

### SAFE AND RUGGED

20-GAUGE STEEL

### 4800 W HOUSED IN A SMALL UNIT

### OPEN COIL GENERATES INSTANT HEAT

### PERMANENTLY ENCLOSED LUBRICATED MOTOR (ASCH4800T)

### VERSATILE: PERMANENT OR TEMPORARY INSTALLATION WITH OPTIONAL SUPPORT BRACKET

### COLORS

- **standard:** red (ASCH40T and ASCH48T models), canary yellow (ASCH4800T)

### FINISH

- epoxy-polyester powdercoat

### MANUFACTURING

- 20-gauge steel cabinet
- sturdy handle for portability that also serves as cord rack and which adapts to the mounting bracket
- 6 ft. (2 m) 12 Awg. molded cable with 3-prong grounded, 30 A 250 V plug
- thermal protection with automatic reset

### MOTOR

- 250 CFM fan (ASCH40T and ASCH48T models)
- permanently enclosed lubricated motor and 300 CFM fan (ASCH4800T)

### ELEMENT

- nichrome element ensuring increased comfort
- cone-shaped to concentrate the air around the element

### CONTROL

- built-in thermostat with control knob protector

### INSTALLATION

- connects to a standard 30 A 250 V (ASCH48T and ASCH4800T models) or a 20 A 250 V (ASCH40T) grounded receptacle
- mounting bracket that can rotate at 360° while preventing the unit from tipping

### WARRANTY

- three years (ASCH4800T)
- two years (ASCH40T and ASCH48T models)

### IDEAL FOR:

construction site

## ACCESSORY

PRODUCT	DESCRIPTION	PRICE
SCH-WBB	mounting bracket	39.50



°STELPRO reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at [www.stelpro.com](http://www.stelpro.com).



FC\_SCH\_LUS\_311018



## TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	CONNECTION	MOUNTING BRACKET	COLOR	WEIGHT	
CODE	WATTS	BTU/H	VOLTS				LB	PRICE
ASCH40T	4000/3000	13 651	240/208	20 A 250 V PLUG	NO	RED	13	207.00
ASCH48T	4800/3600	16 381	240/208	30 A 250 V PLUG	NO	RED	13	230.00
ASCH4800T	4800/3600	16 381	240/208	30 A 250 V PLUG	NO	CANARY YELLOW	13	265.50
ASCH48TWB	4800/3600	16 381	240/208	30 A 250 V PLUG	YES	RED	13	287.50

## THROW DISTANCE AND HEAT RISE

MODEL	UNITS	THROW DISTANCE	HEAT RISE
	KW	FT.	°F
ASCH48T	4.8	19'4"	145
ASCH4800T	4.8	21'	125

## TECHNICAL DRAWINGS

