

# SmokeBlock® Fireblocking Foam

## Applications

SmokeBlock® Fireblocking Foam installs in seconds filling voids and annular spaces around penetrants preventing the spread of smoke and toxic gasses. SmokeBlock® Fireblocking Foam can be applied in both vertical and horizontal applications and is suitable to use in one and two family dwellings. **Not Suitable for Use in Fire-Rated Construction.**

### PHYSICAL PROPERTIES

Color	Salmon Red/Pink
Density	1.56 lbs/ft <sup>3</sup>
Flame Spread	15*
Smoke Development	35*
In Service Temperature	40°F to 200°F
Application Temperature	40°F to 115°F
Cellular Structure	70-80% Closed Cell
Tack Free Time (1" Bead)	10 Minutes
Shelf Life	12 months

\*Tested to ASTM E-84/UL723

## Technical Service


Specified Technologies Inc. provides toll free technical support to assist in product selection and installation information.

## Availability

See Ordering Information below. SpecSeal® SmokeBlock® Products are available from designated authorized STI distributors. Consult the factory or visit the web site ([www.stifirestop.com](http://www.stifirestop.com)) for the names and locations of the nearest sales representatives or distributors.

### ORDERING INFORMATION

UPC#	Cat. No.	Description	Qty.	Case Qty.	Weight (Each)	Packaging
01161	SB200	SmokeBlock® Fireblocking Foam	1	12	Net 0.88 lbs (0.40 kg)	12 oz. can

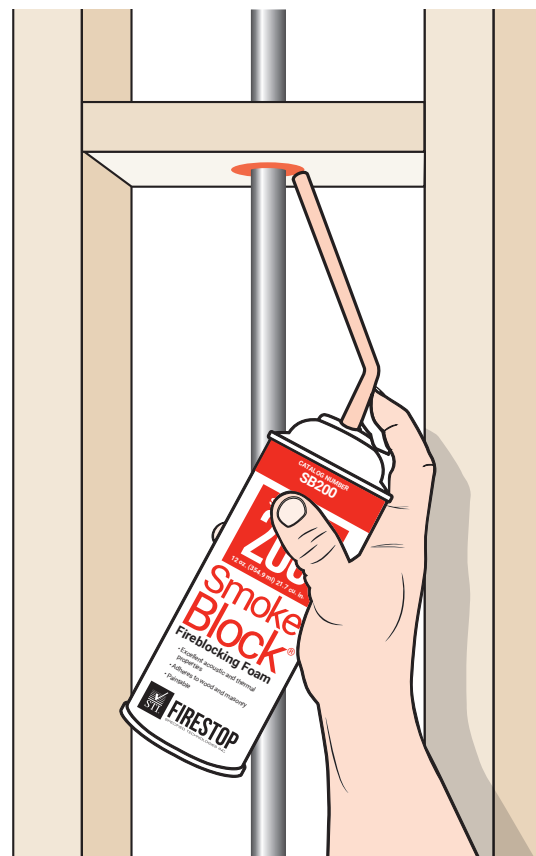

### Features & Benefits

- Excellent acoustic and thermal properties
- Adheres to Wood and Masonry
- Dispensable at any angle
- Paintable

IMPORTANT NOTICE: ALL STATEMENTS, TECHNICAL INFORMATION, AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED UPON TESTING BELIEVED TO BE RELIABLE, BUT THE ACCURACY AND COMPLETENESS THEREOF IS NOT GUARANTEED.

STI TYPICALLY WARRANTS ITS PRODUCTS FOR ONE FULL YEAR. FOR COMPLETE DETAILS OF OUR STANDARD WARRANTY, PLEASE VISIT [WWW.STIFIRESTOP.COM/LEGAL/WARRANTY](http://WWW.STIFIRESTOP.COM/LEGAL/WARRANTY)  
MADE IN THE USA - © 2018 SPECIFIED TECHNOLOGIES INC.

