




Straight Blade Receptacles Tamper-Resistant Hospital Grade Receptacles

15 & 20A, 125V

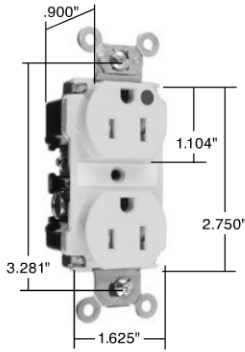

TR62HI

Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	CSA C22.2 No. 42
Hospital Grade Duplex Receptacles Back & Side Wire						
TR62HI	15 125	Ivory	5-15R	•	•	•
TR62HW	15 125	White	5-15R	•	•	•
TR62H	15 125	Brown	5-15R	•	•	•
TR62HGRY	15 125	Gray	5-15R	•	•	•
TR62HRED	15 125	Red	5-15R	•	•	•
TR62HLA	15 125	Light Almond	5-15R	•	•	•
TR63HI	20 125	Ivory	5-20R	•	•	•
TR63HW	20 125	White	5-20R	•	•	•
TR63H	20 125	Brown	5-20R	•	•	•
TR63HGRY	20 125	Gray	5-20R	•	•	•
TR63HRED	20 125	Red	5-20R	•	•	•
TR63HLA	20 125	Light Almond	5-20R	•	•	•
TR63HBL	20 125	Blue	5-20R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R

For PlugTail™ Tamper-Resistant Receptacles, see Pages B-4 and B-5.

For Bulk Packaging Solutions consult factory.

Straight Blade Receptacles Tamper-Resistant Hard Use & Commercial Grade Receptacles


15 & 20A, 125V



Straight Blade Receptacles

Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Corrosion-resistant plated steel strap is locked in to face and back body to resist pulling away from the face/body assembly.
- .032 inch thick brass triple-wipe power contacts.
- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.

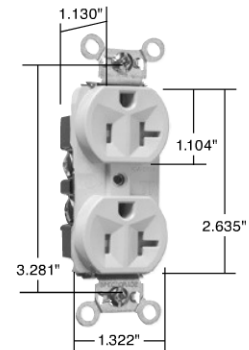


TR5362LA

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	CS C22.2 No. 42
Tamper-Resistant Duplex Receptacles Back & Side Wire						
TR5262I	15 125	Ivory	5-15R	•	•	•
TR5262W	15 125	White	5-15R	•	•	•
TR5262	15 125	Brown	5-15R	•	•	•
TR5262GRY	15 125	Gray	5-15R	•	•	•
TR5262BK	15 125	Black	5-15R	•	•	•
TR5262RED	15 125	Red	5-15R	•	•	•
TR5262LA	15 125	Light Almond	5-15R	•	•	•
TR5362I	20 125	Ivory	5-20R	•	•	•
TR5362W	20 125	White	5-20R	•	•	•
TR5362	20 125	Brown	5-20R	•	•	•
TR5362GRY	20 125	Gray	5-20R	•	•	•
TR5362BK	20 125	Black	5-20R	•	•	•
TR5362RED	20 125	Red	5-20R	•	•	•
TR5362LA	20 125	Light Almond	5-20R	•	•	•

Features


- Dual mechanical shutter system to help prevent insertions of foreign objects.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- .032 inch thick brass triple-wipe power contacts for lasting retention.
- Corrosion-resistant plated steel strap is locked in to the face and back body to resist pulling away from the face/body assembly.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive steel terminal screws. Side wire capability.

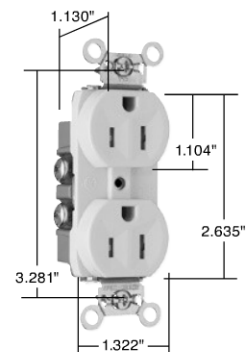

TR15LA

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	cULus cULus	CS C22.2 No. 42
Tamper-Resistant Duplex Receptacles Side Wire						
TR15I	15 125	Ivory	5-15R	•	•	•
TR15W	15 125	White	5-15R	•	•	•
TR15	15 125	Brown	5-15R	•	•	•
TR15GRY	15 125	Gray	5-15R	•	•	•
TR15LA	15 125	Light Almond	5-15R	•	•	•
TR20I	20 125	Ivory	5-20R	•	•	•
TR20W	20 125	White	5-20R	•	•	•
TR20	20 125	Brown	5-20R	•	•	•
TR20GRY	20 125	Gray	5-20R	•	•	•
TR20BK	20 125	Black	5-20R	•	•	•
TR20LA	20 125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



**For Bulk Packaging
Solutions consult factory.**

All devices listed on this page conform to NEMA WD-1 and WD-6.

TR Hard Use & Commercial Grade Recept.