

## Straight Blade Receptacles Quad Receptacles Specifications

### Hard Use Spec Grade & Hard Use Surge Protective Spec Grade Quads

- Isolated ground complied with NEC® 410-56(c) and 250-74 exception 4
- Conforms to NEMA WD-1, WD-6.

#### Electrical

Frequency 60Hz  
Voltage 125V

#### Mechanical

Terminal Identification Brass = Hot, Nickel = Neutral, Green = Ground  
Terminal Accommodation #14 –12 AWG copper and copper-clad  
Product Identification Ratings are permanent part of device  
Weight 10.75 oz.

#### Environmental

Flammability UL94 V2  
Operating Temperature -40°C to 65°C (-40°F to 150°F) continuous without impact

#### Materials


Face Nylon  
Body Nylon  
Line Terminals .035" T-type Triple-Wipe Phosphor Bronze  
Terminal Screws Brass #8-32  
Hex Head Grounding Screw Steel (Green)  
Mounting Screws Zinc-plated steel

### Additional Specifications for Hard Use Surge Protective Spec Grade Quads


- ANSI /IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45
- Installation Categories "A" (ring wave) and "B" (unidirectional impulse)

#### Electrical

MOV Rating 18mm  
UL1449 Suppressed Voltage Rating 500V (L-N, L-G, N-G)  
Noise Attenuation -35db Noise Filtering at 5kHz-50MHz  
Thermal Protection Fused  
Green LED Indicator ON when protection is active,  
OFF when protection is inactive

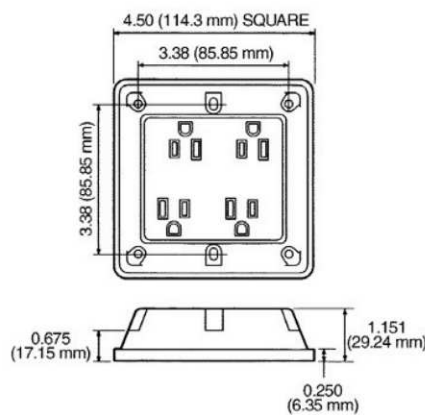

Quad Receptacle

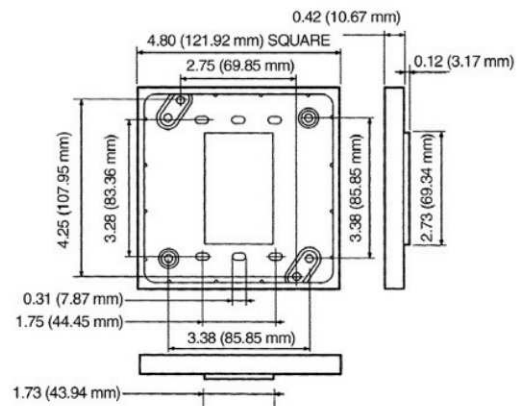

Adapter Plate

# Straight Blade Receptacles Dust & Moisture Resistant & Clock Hanger Receptacles


15 & 20A, 125V



Straight Blade Receptacles

### Features – Dust & Moisture Resistant


- Duplex receptacle has face backed by neoprene gasket which is slit to provide wiping action on plug blades and to provide positive closure when not in use.
- Cellular neoprene sealing mat fits under wall plate.




**6207**  
shown with neoprene  
sealing mat

Catalog Number	Rating A. V.	Description	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	C22.2 No. 42
<b>Dust &amp; Moisture Resistant</b>						
6207	15 125	Duplex, Dust and Moisture Resistant, Gray	5-15R	•	•	•
CR6207	15 125	Duplex, Corrosion, Dust and Moisture Resistant, Yellow	5-15R	•	•	•
6307	20 125	Duplex, Dust and Moisture Resistant, Gray	5-20R	•	•	
6307RED	20 125	Duplex, Dust and Moisture Resistant, Red	5-20R	•	•	
CR6307	20 125	Duplex, Corrosion, Dust and Moisture Resistant, Yellow	5-20R	•	•	

Catalog Number	Rating A. V.	Description	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	C22.2 No. 42
<b>Clock Hangers</b>						
S3713I	15 125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713W	15 125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713BK	15 125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713LA	15 125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•
S3733SS	15 125	Recessed Receptacle with Stainless Steel Wall Plate	5-15R	•	•	•
S3733	15 125	Recessed Receptacle with Brass Wall Plate	5-15R	•	•	•
<b>NEW Tamper-Resistant Clock Hangers Back &amp; Side Wire</b>						
S3713TRI	15 125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713TRW	15 125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713TRGRY	15 125	Recessed Receptacle with Gray Smooth Wall Plate	5-15R	•	•	•
S3713TRBK	15 125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713TRLA	15 125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•




**S3713I**



**S3713TRI**

2 Pole, 3 Wire



All devices listed on this page conform to NEMA WD-1 and WD-6.

Dust & Moisture Resistant & Clock Hanger