




Hose and Cable Protection Systems

TrukTrak® System

Ordering Information and Specifications

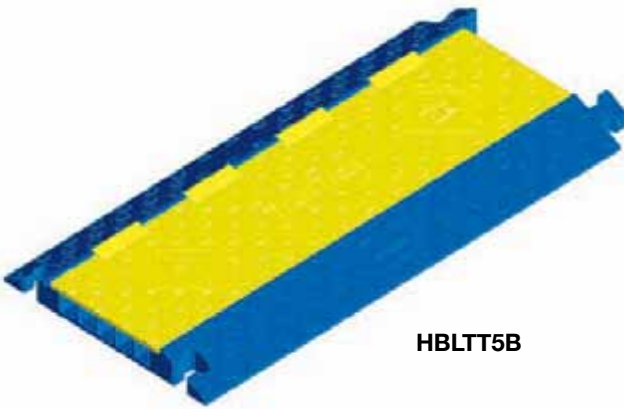

HBLTT5B






HBLTT545LB



HBLTT545RB

		A	B	C		D	E
Description	Catalog Number	Length in. (mm)	Width in. (mm)	Height in. (mm)	Weight lbs. (kg)	Channel Width in. (mm)	Height in. (mm)
TrukTrak® System							
5 Channel TrukTrak®, blue and yellow.	HBLTT5B	36.0" (914)	20" (508)	2.31" (58.7)	29 lbs. (13.2 kg)	1.25" (31.8)	1.25" (31.8)
5 Channel TrukTrak® end caps (pair only), yellow.	HBLTT5ECB (Female)	7.50" (190)	20" (508)	2.31" (58.7)	4.7 lbs. (2.1 kg)	1.25" (31.8)	1.25" (31.8)
	(Male)	5.25" (133)	20" (508)	2.31" (58.7)	4.7 lbs. (2.1 kg)	1.25" (31.8)	1.25" (31.8)
5 Channel 45° right turn TrukTrak®, blue and yellow.	HBLTT545RB	25.0" (635)	20" (508)	2.31" (58.7)	13 lbs. (5.9 kg)	1.25" (31.8)	1.25" (31.8)
5 Channel 45° left turn TrukTrak®, blue and yellow.	HBLTT545LB	25.0" (635)	20" (508)	2.31" (58.7)	13 lbs. (5.9 kg)	1.25" (31.8)	1.25" (31.8)
3 Channel TrukTrak®, blue and yellow.	HBLTT3B	36.0" (914)	20" (508)	3.05" (77.5)	36 lbs. (16.3 kg)	2.25" (57.2)	2.25" (57.2)
3 Channel TrukTrak® end caps (pair only), yellow.	HBLTT3ECB (Female)	8.25" (209)	20" (508)	3.05" (77.5)	6.5 lbs. (2.9 kg)	2.25" (57.2)	2.25" (57.2)
	(Male)	6.38" (162)	20" (508)	3.05" (77.5)	6.5 lbs. (2.9 kg)	2.25" (57.2)	2.25" (57.2)
2 Channel TrukTrak®, blue and yellow.	HBLTT2B	36.0" (914)	22" (559)	4.13" (104.9)	44 lbs. (19.9 kg)	3.25" (82.6)	3.25" (82.6)

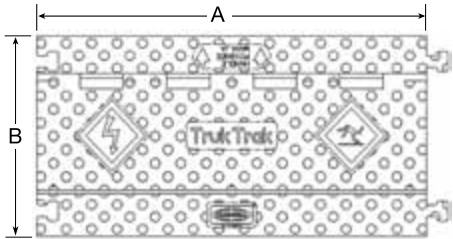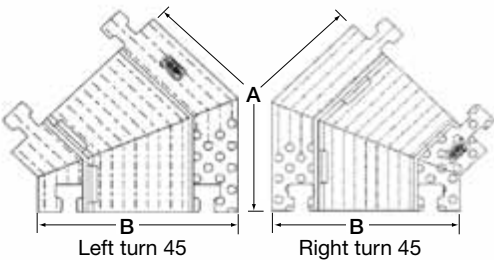

Features	Benefits
High density polyurethane construction.	Supports heavy loads and is weather resistant.
Modular interlocking design.	Easy installation, breakdown and storage.
Safety surface pattern.	Reduces slipping and skidding.
Safety blue and yellow colors.	High visibility.

Specifications

Material	Polyurethane.
Operating Temperature	-40°F to +120°F (-40°C to +49°C).
Hinge Material	Reinforced fiberglass.
Safety Symbols	Per ANSI Z535.3.

Load Capacity

No. of Channels	Test Fixture Footprint in. (mm)	Measured Load lbs. (N) +/- 20%	
		70°F (21°C)	120°F (49°C)
5 Channel	6.9" x 17.3" (175 X 439)	20,150 (89,627)	9,200 (40,921)
3 Channel	6.9" x 17.3" (175 X 439)	14,210 (63,206)	4,653 (20,696)
2 Channel	6.9" x 17.3" (175 X 439)	10,880 (48,394)	2,095 (9,318)

