




GE  
Lighting

## 17705 - F24T8/CW/4 6PK

GE garage & basement 18 watt T8 1-pack

- Passes TCLP, which can lower disposal costs.
- 1.0 inch diameter T8 with medium bi-pin (g13) base
- 24 inches long
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- Lasts 3.4 years based on 6 hours per day usage

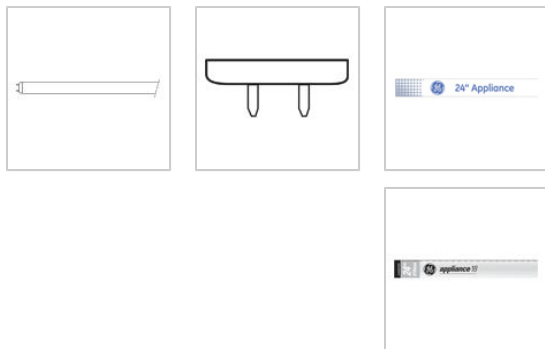

### CAUTIONS & WARNINGS

#### Caution


- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use excessive force when installing lamp.

#### Warning

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.

### GRAPHS & CHARTS

#### Graphs\_Lamp Mortality

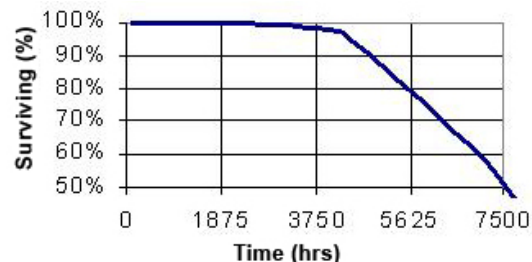

### GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life	7500.0 hrs
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
LEED-EB MR Credit	2308 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Appliance,Speciality

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1150.0
Mean Lumens	1040.0
Nominal Initial Lumens per Watt	63
Color Temperature	4100.0 K
Color Rendering Index (CRI)	60.0

### ELECTRICAL CHARACTERISTICS

Wattage	18.0
Voltage	55.0
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	108 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Preheat Voltage (MIN)	4.25 V
Current Crest Factor (MAX)	1.7

### DIMENSIONS

Maximum Overall Length (MOL)	24.0000 in(609.6 mm)
Minimum Overall Length	23.6700 in(601.2 mm)
Nominal Length	24.000 in(609.6 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA)	1.000 in(25.4 mm)
Max Base Face to Base Face (A)	23.220 in(589.8 mm)
Face to End of Opposing Pin (B) (MIN)	23.400 in(594.4 mm)
Face to End of Opposing Pin (B) (MAX)	23.500 in(596.9 mm)
End of Base Pin to End of Opposite Pin End (C)	23.670 in(601.2 mm)

### PRODUCT INFORMATION

Product Code	17705
Description	F24T8/CW/4 6PK
ANSI Code	2011-1
Standard Package	BUNDLE
Standard Package GTIN	00043168177054
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168981477