




GE
Lighting

46684 - F21W/T5/835/ECO

GE Ecolux® Starcoat® T5

- Passes TCLP, which can lower disposal costs.

a product of
ecomagination

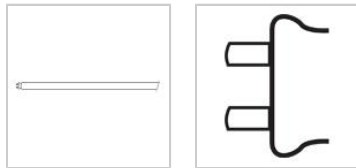

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lumen Maintenance

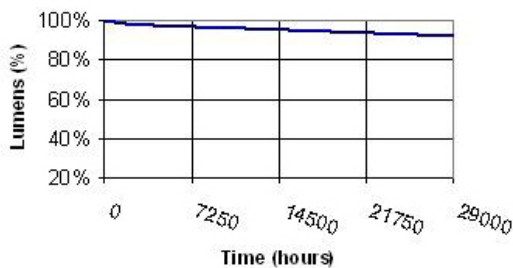

Graphs_Lamp Mortality

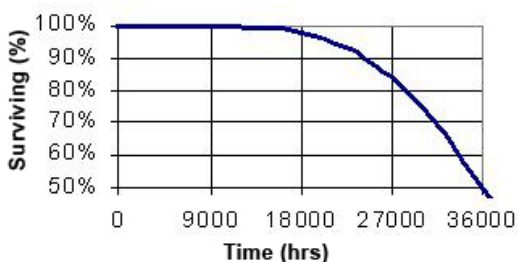

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T5
Rated Life	Miniature Bi-Pin (G5)
Rated Life (rapid start) @ Time	30000.0 hrs
	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	-20.0 °C
LEED-EB MR Credit	43 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	2100.0
Mean Lumens	1930.0
Nominal Initial Lumens per Watt	100
Color Temperature	3500.0 K
Color Rendering Index (CRI)	85.0
S/P Ratio (Scotopic/Photopic Ratio)	1.5

ELECTRICAL CHARACTERISTICS

Wattage	21.0
Voltage	123.0
Open Circuit Voltage (rapid start) Min @ Temperature	340 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	33.4000 in(848.4 mm)
Nominal Length	33.400 in(848.4 mm)
Bulb Diameter (DIA) (MAX)	0.670 in(17.0 mm)
Bulb Diameter (DIA)	0.625 in(15.9 mm)
Max Base Face to Base Face (A)	33.430 in(849.1 mm)
Face to End of Opposing Pin (B) (MIN)	33.610 in(853.7 mm)
Face to End of Opposing Pin (B) (MAX)	33.700 in(856.0 mm)

PRODUCT INFORMATION

Product Code	46684
Description	F21W/T5/835/ECO
Standard Package	Case
Standard Package GTIN	10043168466841
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
UPC	043168466844

Graphs_Spectral Power Distribution

