



Blackburn®

Split-Bolt
T&B Catalog Number:

40HPW
 78378620039

UPC Number:

Active

Status:


Description:

Type HPW Plated Split-Bolt Connector with Spacer and Washer made of Copper Alloy for Use on Copper, Aluminum, ACSR Conductors. Conductor Range for Equal Main and Tap 4/0 Str.-4 Sol.

Features

Bolt and pressure bar of copper alloy, completely tin plated for corrosion resistance. Spacer and washer of tin plated electrolytic copper.

Contoured spacer and bell mouth washer distribute pressure over large area of conductor. Large contoured spacer provides wide separation between copper and aluminum conductors.

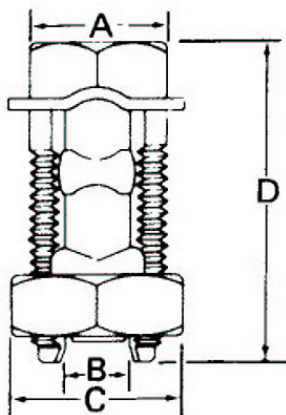

General

| | |
|-----------|------------------------|
| Style | Type HPW |
| Wire Type | Copper, Aluminum, ACSR |
| Material | Copper Alloy |
| Plating | Electro Tin-Plated |

Conductor Range for Equal Main and Tap 4/0 Str.-4 Sol.

Conductor Range Min. Tap with one Max. 4 Sol.

Main

Conductor Range For Equal Main and 4/0-4

Tap ACSR

Dimension Information

| | |
|------------|---------|
| A (inches) | 1 |
| B (inches) | 0.580 |
| C (inches) | 1 5/16 |
| D (inches) | 2 15/32 |

Packaging

| | |
|--------------------|-----------------|
| Package in Units | 25 |
| T&B Sold in UOM | Each |
| T&B Weight Per UOM | 52 lbs. per 100 |

Notes

Blackburn Contax recommended when used on aluminum conductor.

Certifications

| | |
|-----------------|-----|
| RoHS Compliance | Yes |
|-----------------|-----|

Certifications



File Nbr:
 E9809

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com