



Blackburn®

Split-Bolt
T&B Catalog Number:

4HPW
 78378620034

UPC Number:

Active

Status:


Description:

Type HPW Plated Split-Bolt Connector with Spacer and Washer made of Copper Alloy for Use on Copper, Aluminum, ACSR Conductors. Conductor Range for Equal Main and Tap 4 Sol.-12 Sol.

Features

Bolt and pressure bar of copper alloy, completely tin plated for corrosion resistance. Spacer and washer of tin plated electrolytic copper.

Contoured spacer and bell mouth washer distribute pressure over large area of conductor. Large contoured spacer provides wide separation between copper and aluminum conductors.

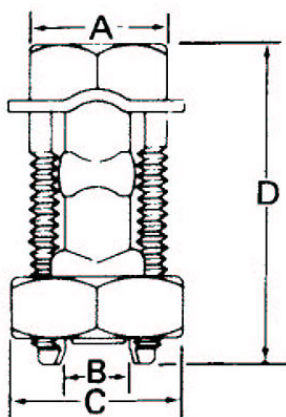

General

Style	Type HPW
Wire Type	Copper, Aluminum, ACSR
Material	Copper Alloy
Plating	Electro Tin-Plated

Conductor Range for Equal Main and Tap 4 Sol.-12 Sol.

Conductor Range Min. Tap with one Max. 12 Sol.

Main

Conductor Range For Equal Main and 6-8

Tap ACSR

Dimension Information

A (inches)	17/32
B (inches)	0.235
C (inches)	23/32
D (inches)	1 9/32

Packaging

T&B Inner Pack	100
Package in Units	400
T&B Sold in UOM	Each
T&B Weight Per UOM	10.38 lbs. per 100

Notes

Blackburn Contax recommended when used on aluminum conductor.

Certifications

RoHS Compliance Yes

Certifications



File Nbr:
 E9809

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com