


21254HB



QUADPLEX Straight Blade Receptacle.

Product Specifications	
Product Type	QUADPLEX Receptacle.
Device Grade	Hospital.
Amperage	20A
Voltage	125V
Poles and Wires	2 Pole, 3 Wire.
Color	Brown
NEMA #	5-20R
Face	Lexan.
Line Contacts	High Performance Brass.
Terminal Screws	#8-32 Combination.
Grounding Screw.	#8-32 (Green) Combination.
Circuit ID	Circuit "A" and "B".
Mounting Screws	Zinc-Plated Steel.
Dielectric Voltage	Withstands 2000V per UL498.
Maximum Working Voltage	250V AC or DC
Current Interrupting	Certified for current interrupting at full rated current.

Temperature Rise	Less than 30 deg C temperature rise at full rated current after 50 cycles overload at 150% rated current for either AC or DC applications per UL498.
Terminal Identification	Brass-Hot; Green-Grounding; Silver-Neutral.
Terminal Accommodation	#14-#10 AWG Copper Conductor Only.
Product Identification	Ratings are a permanent part of the device.
Flammability	UL 94 V2.
Operating Temperature	Maximum Continuous 60 deg C, Minimum -40 deg C (w/o impact).
UL Standard	UL Listed, File #E2258- Guide #RTRT.
CSA Standard	Cetrified to CSA Standard C22.2 No. 42M1984 (General Use Receptacles).
UL Listing	UL Listed, File #E2258- Guide #RTRT.
Federal Specification	Federal Specification WC596 (where applicable).
Complies with:	NEMA Standards WD-1, WD-6.
Overseas Approval	NOM, CE.
Catalog Page	Click here for catalog page

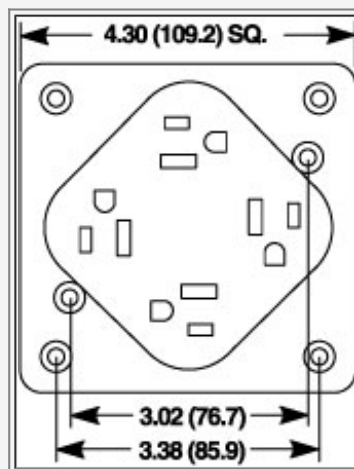

BRYANT®