


# 21254HIL



QUADPLEX Straight Blade Receptacle.

| Product Specifications  |                             |
|-------------------------|-----------------------------|
| Product Type            | QUADPLEX Receptacle.        |
| Device Grade            | Hospital.                   |
| Amperage                | 20A                         |
| Voltage                 | 125V                        |
| Poles and Wires         | 2 Pole, 3 Wire.             |
| Product Enhancement     | Wire Leads.                 |
| Color                   | Ivory                       |
| NEMA #                  | 5-20R                       |
| Face                    | Lexan.                      |
| Line Contacts           | High Performance Brass.     |
| Terminal Screws         | #8-32 Combination.          |
| Grounding Screw.        | #8-32 (Green) Combination.  |
| Circuit ID              | Circuit "A" and "B".        |
| Mounting Screws         | Zinc-Plated Steel.          |
| Dielectric Voltage      | Withstands 2000V per UL498. |
| Maximum Working Voltage | 250V AC or DC               |

|                                |                                                                                                                                                      |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current Interrupting</b>    | Certified for current interrupting at full rated current.                                                                                            |
| <b>Temperature Rise</b>        | Less than 30 deg C temperature rise at full rated current after 50 cycles overload at 150% rated current for either AC or DC applications per UL498. |
| <b>Terminal Identification</b> | Brass-Hot; Green-Grounding; Silver-Neutral.                                                                                                          |
| <b>Terminal Accommodation</b>  | #14-#10 AWG Copper Conductor Only.                                                                                                                   |
| <b>Product Identification</b>  | Ratings are a permanent part of the device.                                                                                                          |
| <b>Flammability</b>            | UL 94 V2.                                                                                                                                            |
| <b>Operating Temperature</b>   | Maximum Continuous 60 deg C, Minimum -40 deg C (w/o impact).                                                                                         |
| <b>UL Standard</b>             | UL Listed, File #E2258- Guide #RTRT.                                                                                                                 |
| <b>CSA Standard</b>            | Cetrified to CSA Standard C22.2 No. 42M1984 (General Use Receptacles).                                                                               |
| <b>UL Listing</b>              | UL Listed, File #E2258- Guide #RTRT.                                                                                                                 |
| <b>Federal Specification</b>   | Federal Specification WC596 (where applicable).                                                                                                      |
| <b>Complies with:</b>          | NEMA Standards WD-1, WD-6.                                                                                                                           |
| <b>Overseas Approval</b>       | NOM, CE.                                                                                                                                             |
| <b>Catalog Page</b>            | <a href="#">Click here for catalog page</a>                                                                                                          |

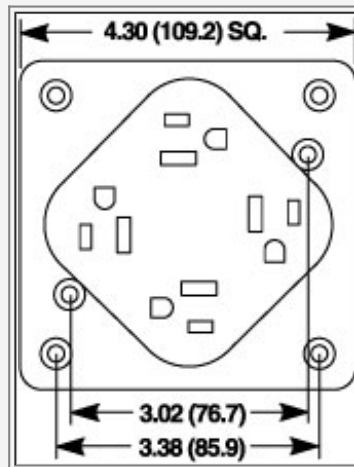

**BRYANT®**