

4997PLR -- Push Button Switch




Single Pole, 20A, 120/277V AC, Pilot Red

Product Specifications

Type	Special Purpose AC
Grade	Industrial
Actuator	Push Button
Actuator Type	Pilot Handle
Switch Contact Type	Single Pole
Amperage	20A
Amperage/Voltage Rating	120/277V AC
Packaging	Single
Color	Red
Wiring Style	Side Wired
Termination Type	Combo Philips/Slotted/Robertson
Base Material	Thermoplastic.
Face Material	Thermoplastic.
Toggle/Actuator Material	Nylon.
Terminals	High Performance Copper Alloy.
Mounting Yoke	Blue Chromate over Zinc Plated Steel.
Contacts	Silver Cadmium Oxide.
Movable Contact Arm	High Performance Copper Alloy.
Dielectric Voltage	Withstands 1500V Minimum.
Max. Working Voltage	277V AC
Overload	Minimum 4.8 times rated current for 100 cycles.
Temp. Rise	30 deg. C maximum at rated current.
Max. Continuous Current	20A
Terminal Accomodation	#14 AWG min.- #10 AWG max.
Flammibility	UL 94 V2.

Operating Temperature	Maximum continuous 75 deg. C- Minimum -40 dec. C (w/o impact).
Standards	Complies with UL 20 and NEMA WD-1.
Catalog Page	Click here for catalog page
UPC Number	78178649970
Weight in LBs	0.2

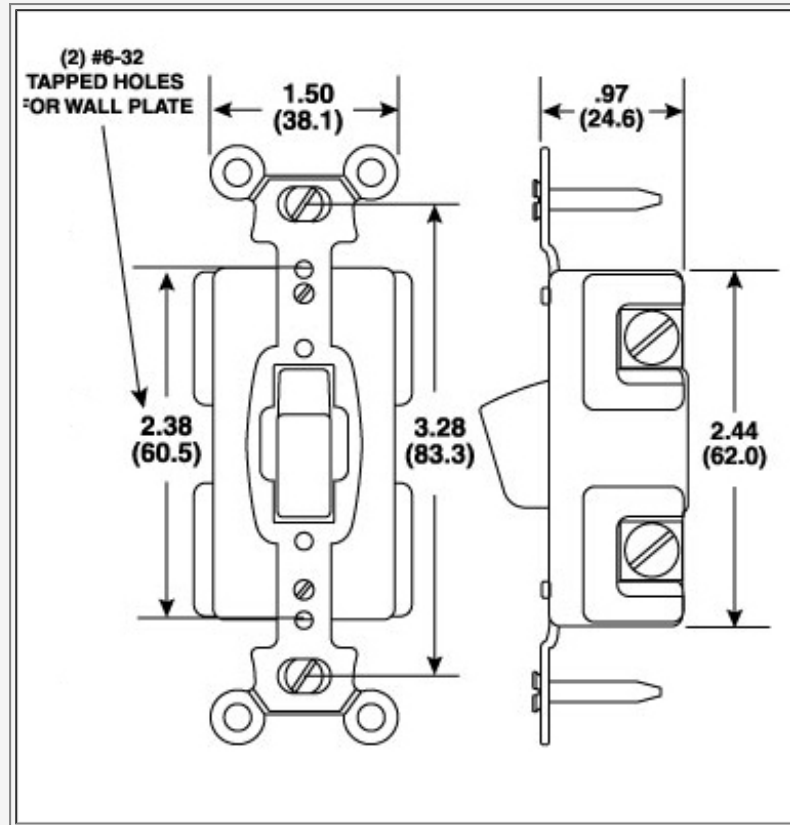

BRYANT®