

5342I




Straight Blade Duplex  
Receptacle.

**Product Specifications**

|                                |                                             |
|--------------------------------|---------------------------------------------|
| <b>Product Type</b>            | Receptacle                                  |
| <b>Device Type</b>             | Duplex.                                     |
| <b>Device Grade</b>            | Heavy Duty.                                 |
| <b>Amperage</b>                | 20A                                         |
| <b>Voltage</b>                 | 125V                                        |
| <b>Poles and Wires</b>         | 2 Pole, 3 Wire.                             |
| <b>Wiring Style</b>            | Side Wired.                                 |
| <b>Color</b>                   | Ivory                                       |
| <b>NEMA #</b>                  | 5-20R                                       |
| <b>Face</b>                    | Nylon.                                      |
| <b>Base</b>                    | Nylon.                                      |
| <b>Line Contacts</b>           | High Performance Brass.                     |
| <b>Clamp Nut</b>               | Steel.                                      |
| <b>Mounting Yoke</b>           | Steel, Nickel and Brass Plated .050" (1.3). |
| <b>Terminal Screws</b>         | Combination Brass #10-32.                   |
| <b>Grounding Screw.</b>        | Combination Brass (Green) #8-32.            |
| <b>Grounding Clamp Nut</b>     | Brass.                                      |
| <b>Auto Ground Clip</b>        | High Performance Brass.                     |
| <b>Mounting Screws</b>         | Combination Steel Zinc-Plated.              |
| <b>Dielectric Voltage</b>      | Withstands 2000V per UL498.                 |
| <b>Maximum Working Voltage</b> | 250V AC or DC                               |

|                                |                                                                                                                                                      |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current Interrupting</b>    | Certified for current interrupting at full rated current.                                                                                            |
| <b>Temperature Rise</b>        | Less than 30 deg C temperature rise at full rated current after 50 cycles overload at 150% rated current for either AC or DC applications per UL498. |
| <b>Terminal Identification</b> | Brass-Hot; Green-Grounding; Silver-Neutral.                                                                                                          |
| <b>Terminal Accommodation</b>  | #14-#10 AWG Copper Conductor Only.                                                                                                                   |
| <b>Product Identification</b>  | Ratings are a permanent part of the device.                                                                                                          |
| <b>Flammability</b>            | UL 94 V2.                                                                                                                                            |
| <b>Operating Temperature</b>   | Maximum Continuous 60 deg C, Minimum -40 deg C (w/o impact).                                                                                         |
| <b>CSA Standard</b>            | Cetrified to CSA Standard C22.2 No. 42M1984 (General Use Receptacles).                                                                               |
| <b>UL Listing</b>              | UL Listed, File #E2258- Guide #RTRT.                                                                                                                 |
| <b>Federal Specification</b>   | Federal Specification WC596 (where applicable).                                                                                                      |
| <b>Complies with:</b>          | NEMA Standards WD-1, WD-6.                                                                                                                           |
| <b>Overseas Approval</b>       | NOM, CE.                                                                                                                                             |
| <b>Catalog Page</b>            | <a href="#">Click here for catalog page</a>                                                                                                          |

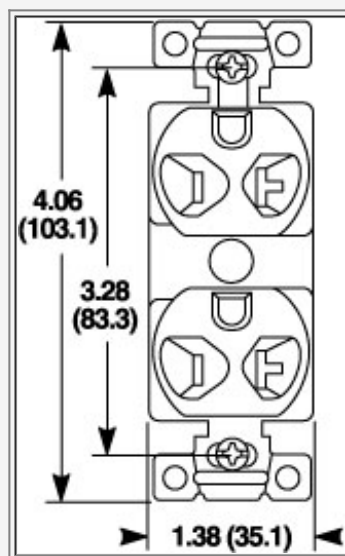

**BRYANT®**