

9200IL




Hospital Grade Fashion
Receptacle.

Product Specifications

Fashion Series Product	Duplex Receptacles.
Amperage	15A
Voltage	125V
Grade	Hospital.
Receptacle Type	Illuminated Face.
Color	Ivory.
Base Material	Rynite Thermoplastic.
Face Material	Nylon.
Line Contacts	High Performance Brass.
Clamp Nut/Back Wire Clamp	Steel.
Ground Contacts	High Performance Brass.
Mounting Yoke	.050" (1.3) Steel (zinc plating).
Terminal Screws	Combination Brass #8-32.
Ground Screw	Combination Brass (Green) #8-32.
Dielectric Voltage	Withstands 2,000V minimum.
Max. Working Voltage	250V
Temp. Rise	Max. 30 deg. C temperature rise at full rated current after 50 cycles of overload at 150% of rated current with direct current.
Terminal Accomodation	#14-#10 AWG copper conductor only.
Terminal Identification	Ratings are a permanent part of the device.

Flammability	UL 94 V2
Operating Temperature	Max. continuous 60 deg. C, minimum -40 deg. C (w/o impact).
UL Certification	File E2258, Guide RTRT.
CSA	Certified to CSA, C22.2, no. 42 where applicable.
Standards	Complies with NEMA WD-1 Heavy Duty and WD-6 requirements.
Catalog Page	Click here for catalog page

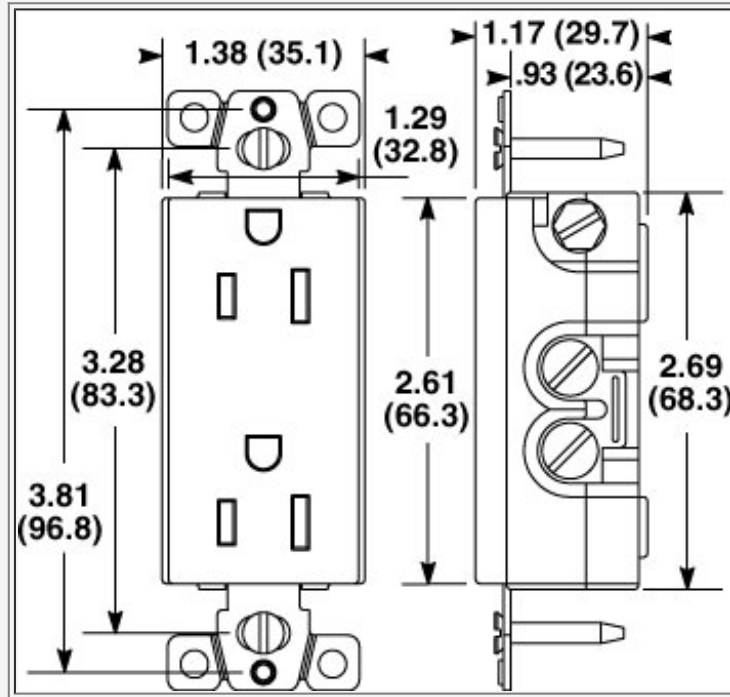

BRYANT®