



VEXA400 4-Sided EXIT for all Models
Letters are 3/4" x 8" Red on white
Unit includes 3 EXIT Faces and
2 Blank for Maximum Flexibility
Dimensions: 14.56" x 9.22"



VEXA100B 3-Sided EXIT Accessory for xE3x models
Letters are 3/4" x 6" Red on White

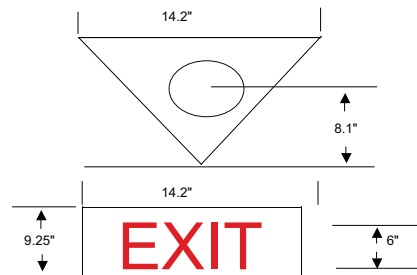

VEXA100B Exit Accessory Dimensions

FEATURES-SPECIFICATIONS

REPLACEMENT BATTERY UNITS	
WATTAGE/TYPE	CATALOG NUMBER
13W BI-PIN	KFBP6 FOR DEXB
13W BI-PIN	KFBP5 FOR VEXB
18/26/32/42W QUAD-PIN	KFBP7

REPLACEMENT LAMPS	
WATTAGE/TYPE	CATALOG NUMBER
13W BI-PIN	MPL-13
26W QUAD-PIN	MQL18
26W QUAD-PIN	MQL26
32W QUAD-PIN	MQL32
42W QUAD-PIN	MQL42

See pages L94-L96 for VM mounts, optics and accessories including reflectors and suspension devices.

BALLAST DATA *						
LAMP WATTS	VOLTAGE AC	START	OPERATING	INPUT WATTS	BALLAST CIRCUIT	REGULATION
26WATT (1X13)	120 / 277	0.39/.35	0.3	16	NPF	—
26WATT (2X13)	120 / 277	0.78/.70	0.6	32	NPF	—
18 WATT (1X18)	120 THROUGH 277	—	.16@120V /.07 @277V	19	HPF	—
26WATT (1X26)	120 THROUGH 277	—	.27@120V /.13 @277V	29	HPF	ELECTRONIC
32WATT (1X32)	120 THROUGH 277	—	.31@120V /.15 @277V	36	HPF	ELECTRONIC
42WATT (1X42)	120 THROUGH 277	—	.37@120V /.17 @277V	46	HPF	ELECTRONIC
36 WATT (2X18)	120 THROUGH 277	—	.32@120V /.14 @277V	38	HPF	—
52WATT (2X26)	120 THROUGH 277	—	.54@120V /.26 @277V	58	HPF	ELECTRONIC
64WATT (2X32)	120 THROUGH 277	—	.62@120V /.30 @277V	72	HPF	ELECTRONIC
84WATT (2X42)	120 THROUGH 277	—	.74@120V /.34 @277V	92	HPF	ELECTRONIC

* Add per battery prox .6 amp for charging current. Prox 24 hours to full recharge after full discharge.

APPLICATION DATA					
CATALOG SERIES*	LAMP WATTS	AMBIENT DEG. C	CLASS II DIVISION 1®		SUPPLY WIRE TEMP. MIN. °C
			GLOBE OR REFRACTOR®	GLOBE + REFLECTOR	
DE3B0013	1 X 13	40	T3B (EFG)	T3B (EFG)	60
DE3B0026	2 X 13	40	T3B (EFG)	T3C (EFG)	60
DE3B1313	1 X 13	40	T3B (EFG)	T3C (EFG)	60
DE3B2613	2 X 13	40	T3B (EFG)	T3C (EFG)	60
DE3B2626	2 X 13	40	T3B (EFG)	T3C (EFG)	60
DE4B0013	1 X 13	40	T4A (EFG)	T4A (EFG)	60
DE4B0026	2 X 13	40	T4A (EFG)	T4A (EFG)	60
DE4B1313	1 X 13	40	T4A (EFG)	T4A (EFG)	60
DE4B2613	2 X 13	40	T4A (EFG)	T4A (EFG)	60
DE4B2626	2 X 13	40	T4A (EFG)	T4A (EFG)	60

① T-codes for Refractors include VMR "All Glass" and VZ Spin-Top Types. Also applies for VMER40 and VMEP40 in DE4B models.

② Models suitable for Class II Div. 1 are also suitable for Class III.

* DE3B models use 5-1/2" CertiLite® V VM optics; DE4B models use 7-3/4" VM optics.



KILLARK®