


## Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

## Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)

## 3565 -- 45 Degree Liquidtight Connector Insulated 1-1/4" Trade Size

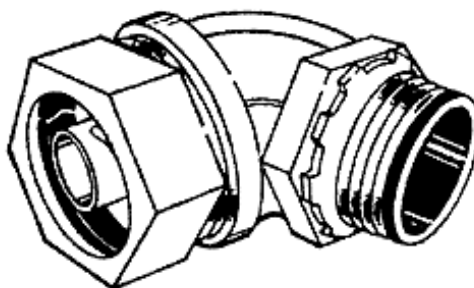

### Product Specifications

|                         |                                         |
|-------------------------|-----------------------------------------|
| Family                  | Liquidtight Conduit and Cord Connectors |
| Fittings Classification | Malleable Iron - 45 Degree Connectors   |
| Sub Class               | Insulated                               |
| Trade Size              | 1-1/4"                                  |
| Standard Packaging      | Carton                                  |
| Ship Carton Length      | 8.00                                    |
| Ship Carton Width       | 7.125                                   |
| Ship Carton Height      | 4.625                                   |
| WT. PER HU.             | 95.96                                   |
| Dimension A             | 2-7/16"                                 |
| Dimension B             | 23/32"                                  |
| Thread Spec. B          | 1-1/4-11-1/2 NPT                        |
| Dimension C             | 4-1/16"                                 |
| Dimension D             | 1-1/2"                                  |
| Unit Carton Quantity    | 10                                      |
| Ship Carton Quantity    | 10                                      |
| UPC Number              | 050169035658                            |

### Applications

- For use in outdoor or indoor locations on flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Use to positively bond the conduit to a box or enclosure
- RACO® liquidtight connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

### Product Features

- Patented split gland-ring is designed to slip onto the conduit

quickly and to grip the jacket of the conduit, speeding installation, assuring a perfect seal, and preventing pullouts

- Malleable iron castings mate with other components perfectly without strain or distortion
- All components are reusable -- RACO® liquidtight connectors may be easily disassembled and reused after years of service
- Sealing washer (included) provides a liquidtight seal when terminating the connector in a threadless opening
- Heavy duty locknut included with every RACO® liquidtight connector assures continuity of ground
- All metallic components are zinc electro plated for added corrosion protection
- Bodies - 3/8" to 2" Malleable Iron ; •Nuts - 3/8" to 1" Steel, 1-1/4" to 2" Malleable Iron

#### Compliances

UL CSA

