


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)
[Home Page](#)
[Search](#)

3792-6 -- 90Degree Cord Grip Connector 1/2" Trade Size .500 - .600

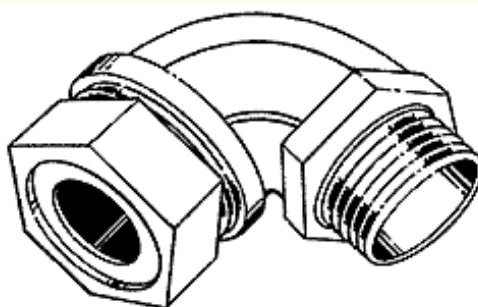

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Steel / Malleable Iron Strain Relief Connectors
Sub Class	1/2 inch Hubs Form 2
Trade Size	1/2"
Cable Range	.500 - .600
Standard Packaging	Carton
Ship Carton Length	8.25
Ship Carton Width	5.00
Ship Carton Height	4.00
WT. PER HU.	22.3
Dimension A	1-3/16"
Thread Spec. A	1/2-14 NPT
Dimension B	19/32"
Dimension C	1-5/16"
Dimension D	1-7/16"
Unit Carton Quantity	25
Ship Carton Quantity	25
UPC Number	050169379264

Applications

- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- RACO® liquidtight strain relief cord connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- All steel/malleable construction provides mechanical strength
- Malleable iron castings mate with other components without strain or distortion
- Unique Neoprene grommet design -- grommet is forced up and around the cord when the nut is tightened for a positive liquidtight seal
- Washers have size range imprinted for identification -- eliminates misidentifying inventory
- Use RACO® locknuts and sealing washers to complete a liquidtight installation on a sheet metal box or panel
- All metallic components are zinc electro plated for corrosion protection
- Bodies - 1/2" to 3/4" Malleable Iron; Nuts - 1/2" to 3/4" Steel

Compliances

C/UL/US

