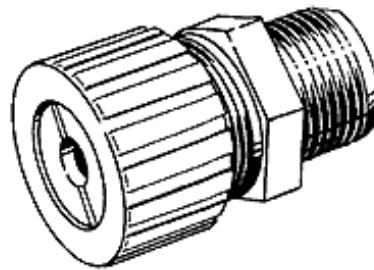


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)**4700-6 -- Nylon Cord Grip .375 - .437 3/8" Hub**

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Nonmetallic Strain Relief Cord Connectors
Trade Size	3/8"
Cable Range	.375 - .437
Standard Packaging	Carton
Ship Carton Length	6.25
Ship Carton Width	4.5
Ship Carton Height	4.25
WT. PER HU.	5
Dimension A	63/64"
Dimension B	7/16"
Dimension C	1-3/32"
Dimension D	7/16"
Unit Carton Quantity	25
Ship Carton Quantity	25
UPC Number	050169470060

Applications


- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Nonmetallic liquidtight strain relief cord connectors are suitable for in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Nylon construction is lightweight and easy to use
- Neoprene grommet
- Resists most common industrial corrosives
- Color-coded Gotcha® ring provides fast identification of cord size

Compliances

UL CSA

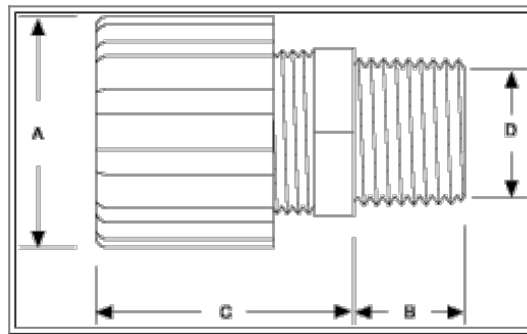

[Login](#) | [Privacy](#) | [Site Map](#)