


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)

4702-1 -- Nylon Cord Grip .062 - .125 1/2" Hub

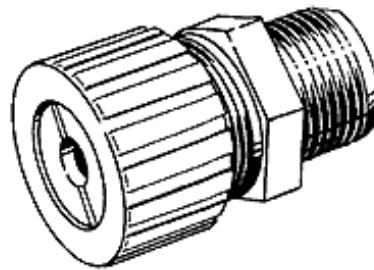

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Nonmetallic Strain Relief Cord Connectors
Trade Size	1/2"
Cable Range	.062 - .125
Standard Packaging	Carton
Ship Carton Length	8.25
Ship Carton Width	5.00
Ship Carton Height	4.00
WT. PER HU.	7.7
Dimension A	1-1/4"
Dimension B	17/32"
Dimension C	1-1/2"
Dimension D	37/64"
Unit Carton Quantity	25
Ship Carton Quantity	25
UPC Number	050169470213

Applications


- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Nonmetallic liquidtight strain relief cord connectors are suitable for in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Nylon construction is lightweight and easy to use
- Neoprene grommet
- Resists most common industrial corrosives
- Color-coded Gotcha® ring provides fast identification of cord size

Compliances

UL CSA

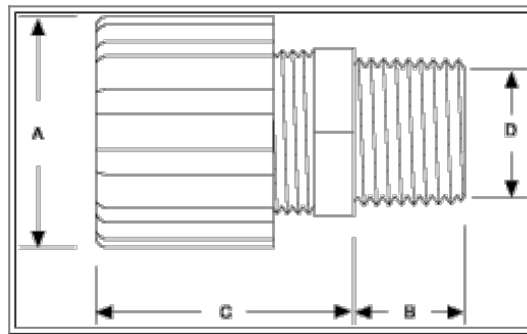

[Login](#) | [Privacy](#) | [Site Map](#)