

Products


- > [Index](#)
- > [Featured Products](#)
- > [Cross Reference](#)
- > [UPC Search](#)

**Product Datasheet**

[Catalog Home](#) [Home Page](#)

[Search](#)

## 4723 -- 3/4" Non Metallic Liquidtight Straight Connector

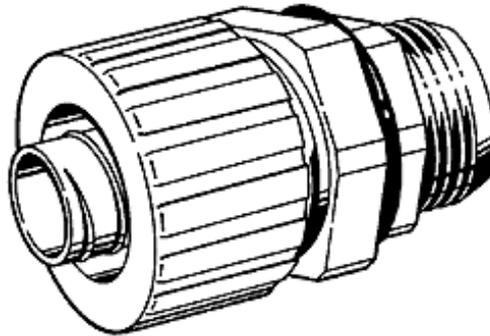

**Product Specifications**

<b>Family</b>	Liquidtight Conduit and Cord Connectors
<b>Fittings Classification</b>	Nonmetallic Connectors
<b>Sub Class</b>	Straight Connector Nylon
<b>Trade Size</b>	3/4"
<b>Standard Packaging</b>	Carton
<b>Ship Carton Length</b>	10.00
<b>Ship Carton Width</b>	5.25
<b>Ship Carton Height</b>	4.3125
<b>WT. PER HU.</b>	5.6
<b>Dimension A</b>	1.53"
<b>Dimension B</b>	2.22"
<b>Dimension C</b>	.58"
<b>Dimension D</b>	.74"
<b>Dimension E A/C</b>	1.85"
<b>Dimension E A/F</b>	1.53"
<b>Unit Carton Quantity</b>	25
<b>Ship Carton Quantity</b>	25
<b>UPC Number</b>	050169947234

**Applications**

- For use in dry or wet locations when the conduit and fittings are not subject to physical damage
- Use Type B conduit and fittings whenever flexibility is required for installation, operation, or maintenance

**Product Features**

- All gray nonmetallic construction provides superior corrosion

resistance

- Each connector is supplied with a Neoprene o-ring and nylon locknut
- UPC bar coded fittings are individually polybagged with a preprinted UPC-A bar code and packaged in pre-scored tear top cartons for an attractive presentation

#### Compliances

UL Standard 514B CSA - C22.2 #18 NEMA Type 4x, 12 and 13 (Fittings)

