

Products


- › Index
- › Featured Products
- › Cross Reference
- › UPC Search

**Product Datasheet**

[Catalog Home](#) [Home Page](#)

[Search](#)

## 4801-1 -- Aluminum Cord Grip Connector .125 - .187 1/2" Hub

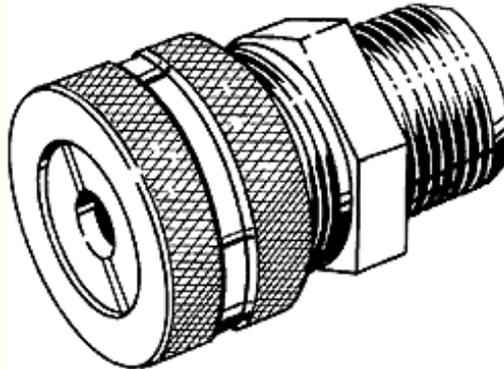

**Product Specifications**

<b>Family</b>	Liquidtight Conduit and Cord Connectors
<b>Fittings Classification</b>	Aluminum Strain Relief Cord Connectors
<b>Sub Class</b>	1/2" Hubs form2
<b>Trade Size</b>	1/2"
<b>Cable Range</b>	.125 - .187
<b>Standard Packaging</b>	Carton
<b>Ship Carton Length</b>	6.25
<b>Ship Carton Width</b>	4.5
<b>Ship Carton Height</b>	4.25
<b>WT. PER HU.</b>	5.9
<b>Dimension A</b>	1.13"
<b>Dimension B</b>	.55"
<b>Dimension C</b>	1.10"
<b>Dimension D</b>	.64"
<b>Dimension E A/C</b>	1.11"
<b>Dimension E A/F</b>	1.00"
<b>Unit Carton Quantity</b>	25
<b>Ship Carton Quantity</b>	25
<b>UPC Number</b>	050169480113

**Applications**

- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Aluminum liquidtight strain relief cord connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

### Product Features

- Aluminum construction provides a corrosion-resistant installation
- Patented Gotcha® ring incorporates a split hinge design to prevent friction and to provide strain relief
- Neoprene grommet
- Knurled compression nut allows the fittings to be hand tightened to UL requirements
- Gotcha® ring is color-coded for sizing identification

### Compliances

UL CSA

