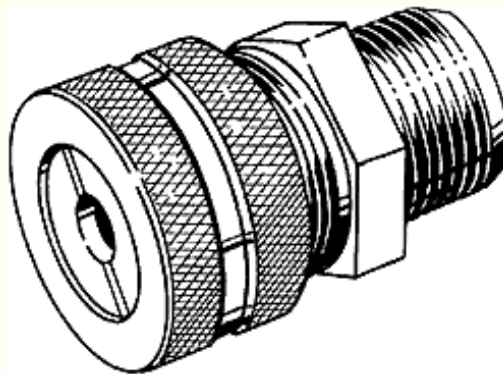


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)**4801-2 -- Aluminum Cord Grip Connector .187 - .250 1/2" Hub**

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Aluminum Strain Relief Cord Connectors
Sub Class	1/2" Hubs form1
Trade Size	1/2"
Cable Range	.187 - .250
Standard Packaging	Carton
Ship Carton Length	6.25
Ship Carton Width	4.5
Ship Carton Height	4.25
WT. PER HU.	5.9
Dimension A	.88"
Dimension B	.46"
Dimension C	.90"
Dimension D	.44"
Dimension E A/C	1.00"
Dimension E A/F	.88"
Unit Carton Quantity	25
Ship Carton Quantity	25
UPC Number	050169480120

Applications

- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Aluminum liquidtight strain relief cord connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Aluminum construction provides a corrosion-resistant installation
- Patented Gotcha® ring incorporates a split hinge design to prevent friction and to provide strain relief
- Neoprene grommet
- Knurled compression nut allows the fittings to be hand tightened to UL requirements
- Gotcha® ring is color-coded for sizing identification

Compliances

UL CSA

